

APPROCHE AUX INSTRUMENTS

Instrument approach

CAT A B C

ALT AD : 74, DTHR : 59 (2 hPa)

LA ROCHELLE ILE DE RE

RNP RWY 09

ATIS LA ROCHELLE 126.880

APP : LA ROCHELLE Approche /Approach 124.200


TWR : LA ROCHELLE Tour /Tower 118.000

Absence ATS :

A/A (118.000) FR uniquement. Obtenir le QNH de NANTES sur ATIS NANTES 126.930 ou NANTES Information 130.275 - 119.400 (s).


A/A (118.000) FR only. Obtain NANTES QNH on NANTES ATIS 126.930 or NANTES Information 130.275 - 119.400 (s).

RNP APCH

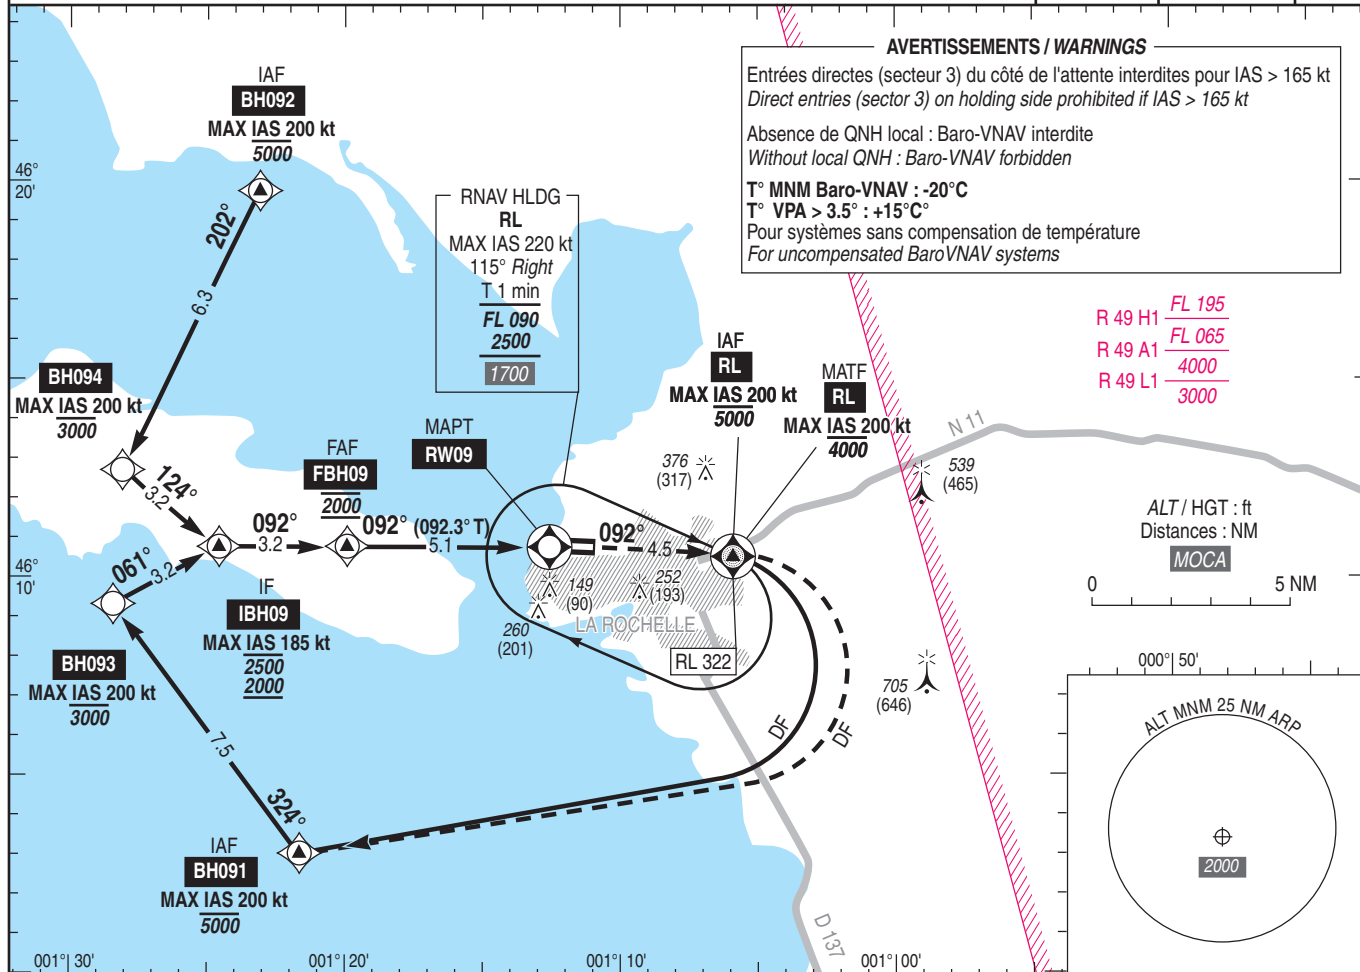EGNOS
Ch 90774
E09A
TCH : 49VAR
0°
(2020)

TA : 5000

R 49 L1/A1/H1 3000-FL195

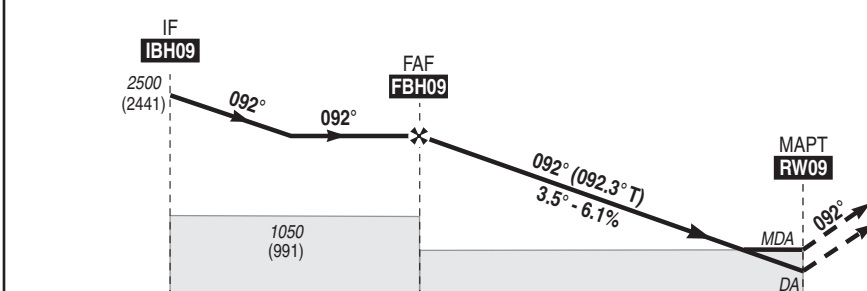

API : Monter vers RL jusqu'à 4000 (3941) puis tourner à droite direct vers BH091.

Missed APCH : Climb up to 4000 (3941) inbound to RL then turn right direct to BH091.

→ DTHR (NM) 8.3 5.1 0

MNM AD : distances verticales en pieds, RVR et VIS en mètres / vertical distances in feet, RVR and VIS in metres.

REF HGT : ALT DTHR

CAT	LPV			LNAV-VNAV			LNAV			MVL/Circling ⁽¹⁾		MVL/Circling absence ATS ⁽²⁾		DIST RW09					
	DA (H)	RVR	OCH	DA (H)	RVR	OCH	MDA (H)	RVR	OCH	MDA (H)	VIS	MDA (H)	VIS						
A			184	310 (250)		232				560 (500)	1500	840 (790)	1500	NM ALT (HGT)	5 1970 (1911)	4 1600 (1541)	3 1220 (1161)	2 850 (791)	1 480 (421)
B	310 (250)	1300	199	310 (250)	1300	247	400 (340)	1500	337	680 (620)	1600	960 (900)	1600						
C			209	330 (270)		269				780 (720)	2400	1060 (1000)	2400						

Observations/Remarks : (1) MVL interdites au Sud de la piste / Circling prohibited South of RWY.

(2) MVL H24 pour aéronefs autorisés PCL / Circling 24HR for ACFT authorized with PCL.

FBH09 - RW09	5.1 NM	70 kt 5 min 59	85 kt 4 min 56	100 kt 4 min 11	115 kt 3 min 39	130 kt 3 min 13	160 kt 2 min 37
VSP (ft/min)		400	480	570	650	740	910