

APPROCHE AUX INSTRUMENTS

LA ROCHELLE ILE DE RE

Instrument approach

CAT A B C

ALT AD : 74, DTHR : 74 (3 hPa)

RNP RWY 27

ATIS LA ROCHELLE 126.880

APP : LA ROCHELLE Approche / Approach 124.200

TWR : LA ROCHELLE Tour / Tower 118.000


Absence ATS : A/A (118.000) FR uniquement. Obtenir le QNH de NANTES sur ATIS NANTES 126.930 ou NANTES Information 130.275 - 119.400 (s).

A/A (118.000) FR only. Obtain NANTES QNH on NANTES ATIS 126.930 or NANTES Information 130.275 - 119.400 (s).

RNP APCH

EGNOS
Ch 46260
E27AVAR
0°
(2020)

TCH : 45

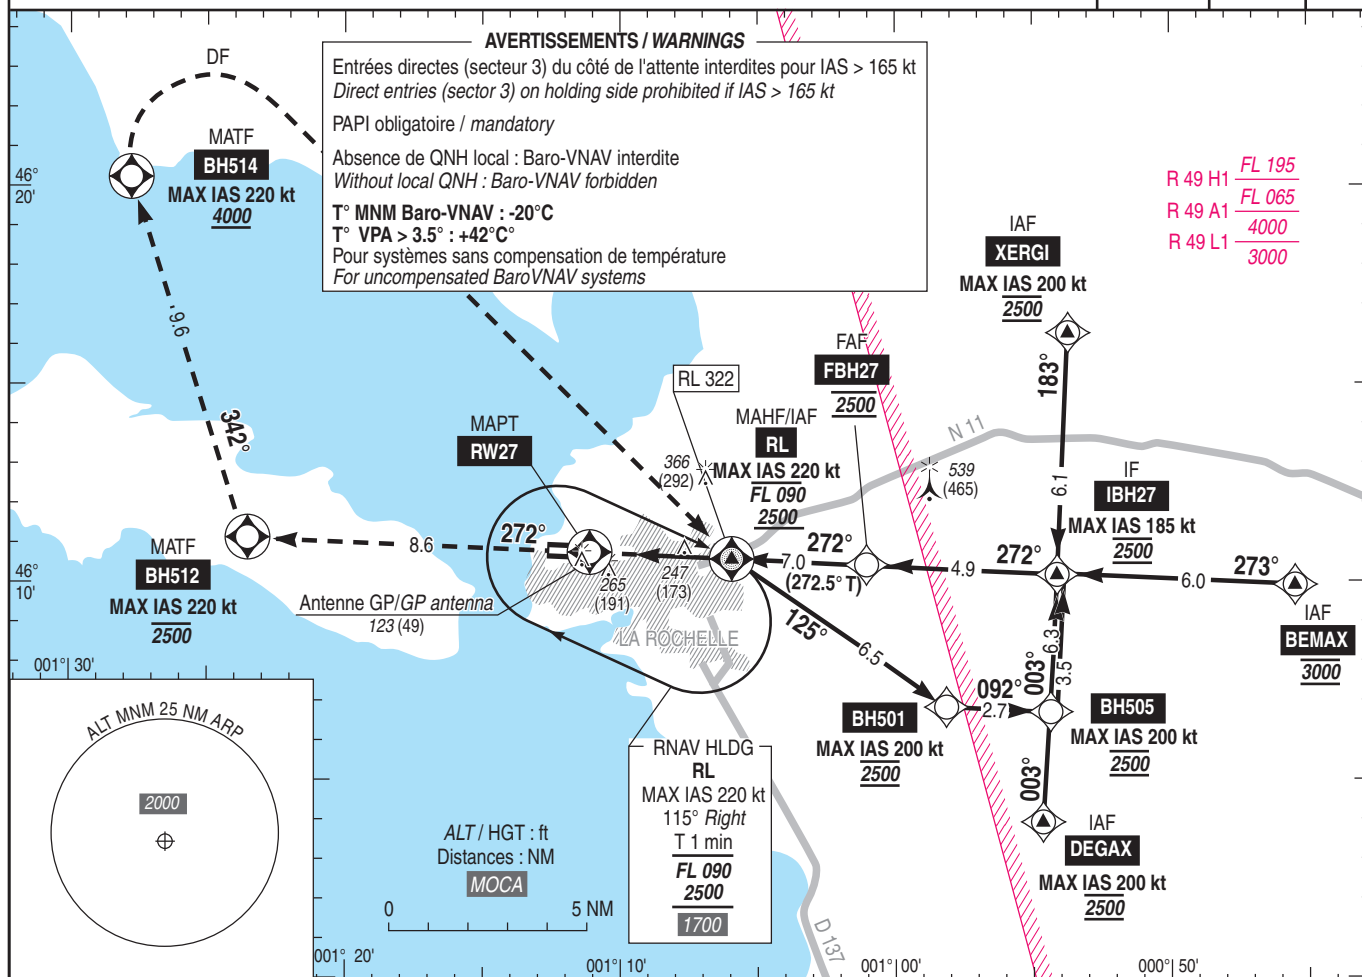


TA : 5000

R 49 L1/A1/H1 3000-FL195

API : Monter vers **BH512** jusqu'à 2500 (2426) puis tourner à droite vers **BH514** en montée vers 4000 (3926) puis tourner à droite direct vers **RL**.
Monter à 1500 (1426) avant d'accélérer en palier.

Missed APCH : Climb up to 2500 (2426) inbound **BH512** then turn right to **BH514** climbing to 4000 (3926) then turn right direct to **RL**.
Climb up to 1500 (1426) prior to level acceleration.

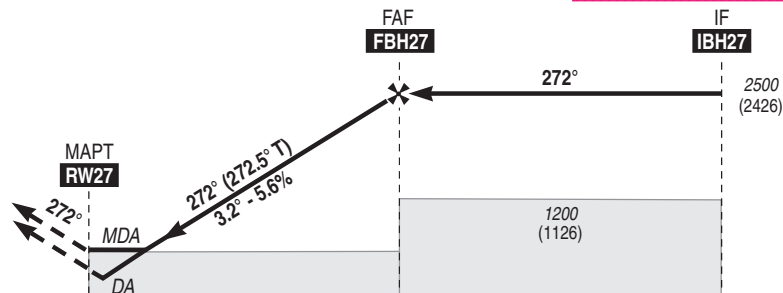

DTHR ← (NM)

0

7.0

11.9

MNM AD : distances verticales en pieds, RVR et VIS en mètres / vertical distances in feet, RVR and VIS in metres.

REF HGT : ALT DTHR

CAT	LPV			LNAV-VNAV			LNAV			MVL/Circling ⁽¹⁾		MVL/Circling absence ATS ⁽¹⁾⁽²⁾		DIST RW27					
	DA (H)	RVR	OCH	DA (H)	RVR	OCH	MDA (H)	RVR	OCH	MDA (H)	VIS	MDA (H)	VIS	NM	2	3	4	5	6
A	280 (200)		184	350 (270)		270				560 (490)	1500	840 (770)	1500						
B	280 (200)	750	197	360 (280)	900	278	500 (420)	1500	419	680 (600)	1600	960 (890)	1600	ALT (HGT)	805 (731)	1145 (1071)	1485 (1411)	1825 (1751)	2165 (2091)
C	280 (210)		205	370 (290)		286				780 (700)	2400	1060 (990)	2400						

Observations/Remarks : (1) MVL interdites au Sud de la piste / Circling prohibited South of RWY.

(2) MVL H24 pour aéronefs autorisés PCL / Circling 24HR for ACFT authorized with PCL.

FBH27 - RW27	7.0 NM	70 kt 5 min 59	85 kt 4 min 56	100 kt 4 min 11	115 kt 3 min 39	130 kt 3 min 13	160 kt 2 min 37
VSP (ft/min)		400	480	570	650	740	910