

APPROCHE AUX INSTRUMENTS

Instrument approach

CAT A B C

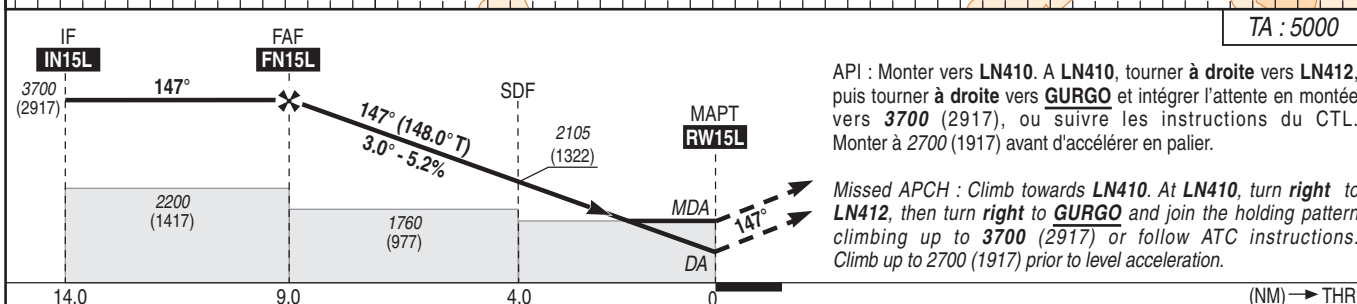
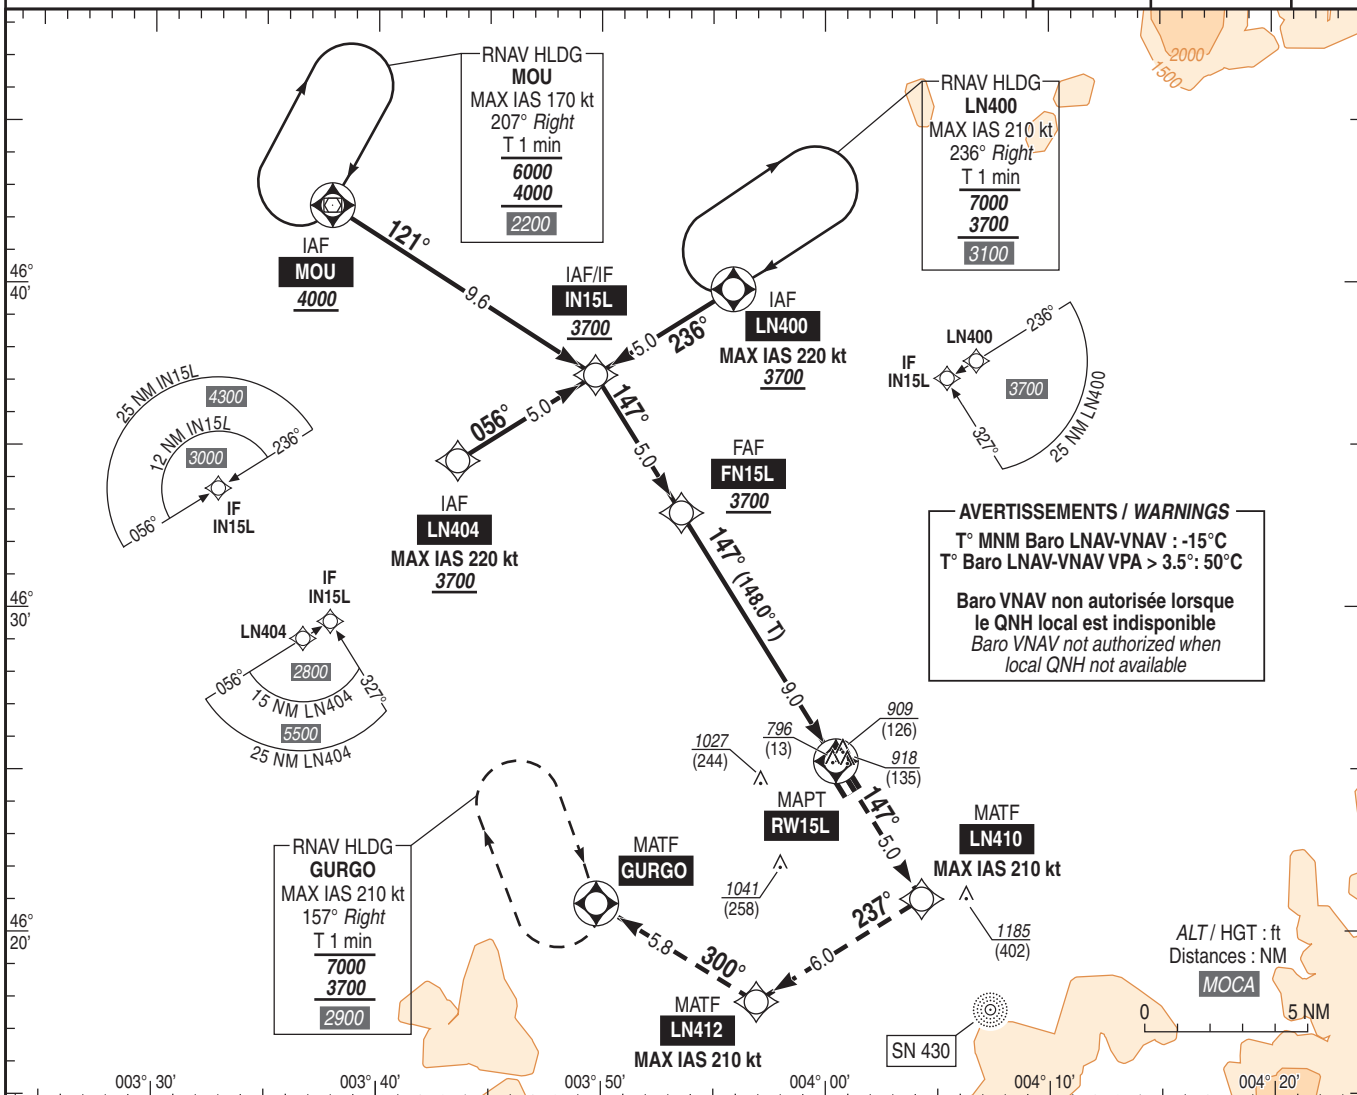
ALT AD : 797, THR : 783 (28 hPa)

SAINT YAN

RNP RWY 15L

ATIS SAINT YAN : 132.480
FREQ : voir / see AD 2 LFLN COM 01

RNP APCH

EGNOS
Ch 73334
E15A
RDH/TCH : 49VAR
2°E
(2020)

MNM AD : distances verticales en pieds, RVR et VIS en mètres / vertical distances in feet, RVR and VIS in metres. REF HGT : ALT THR

CAT	LPV			LNAV-VNAV			LNAV			MVL/Circling (1)		DIST RW15L	
	DA (H)	RVR	OCH	DA (H)	RVR	OCH	MDA (H)	RVR	OCH	MDA (H)	VIS	MDA (H)	VIS
A			144	1060 (280)	1300	273		1500		1330 (550)	1500	1560 (780)	1500
B	1090 (300)	1400	154	1070 (290)	1400	285	1190 (410)	1500	402	1340 (560)	1600	1580 (790)	1600
C			164	1090 (310)	1400	304		1900		1580 (800)	2400	1820 (1040)	2400

Observations / Remarks : (1) MVL interdites à l'Est des pistes. Circuit AD RWY 15 : main droite / Circling prohibited East of RWYs. Right hand circuit RWY 15.
Perte de guidage GNSS lors de l'approche / Loss of GNSS guidance during approach : voir / see AIP ENR 1.5.

FAF - RW15L	9.0 NM	70 kt 7 min 43	85 kt 6 min 22	100 kt 5 min 24	115 kt 4 min 42	130 kt 4 min 10	145 kt 3 min 44	160 kt 3 min 23	185 kt 2 min 55
VSP (ft/min)		370	450	530	610	690	770	850	980