

 Service de l'Information Aéronautique D S N A	 Liberté • Égalité • Fraternité RÉPUBLIQUE FRANÇAISE e-mail : sia.qualite@aviation-civile.gouv.fr Internet : www.sia.aviation-civile.gouv.fr	AIP SUP 086/21 Publication date : 15 APR
---	--	--

Subject : Creation of 89 Tempo Restricted Areas (ZRT) and 3 Tempo Danger Areas (ZDT) at medium and high altitude, for State unmanned ACFT flying towards and within a work area

With effect : From 22 April 2021 to 20 April 2022

Location : UIR : France - FIR : Bordeaux LFBB, Brest LFRR, Paris LFFF, Reims LFEE

ACTIVITY
State remotely piloted ACFT flying through special status airspace published in AIP France, ENR 5.

DATES AND TIMES OF ACTIVITY
These Tempo Areas can be activated according to Protocol from 22 April 2021 to 20 April 2022.
Activation by NOTAM with 6 HR prior notice when the Areas are activated for security reasons, and on the working day before, before 1100 UTC (SUM : - 1 HR) when activated for exercise or for training

MANAGING AUTHORITIES
- ZRT Paris 140 and 150, ZRT Le Bourget 140 and 150, Persan, Brétigny and Paris Lift : «Élément Air de Contrôle de l'Aéroport Paris CDG / Roissy-EACA» - ZRT La Tranche sur Mer : Mont-de-Marsan CRC (Control and Reporting Centre) or back-up CRC - Other ZRTs : Cinq-Mars-la-Pile CRC or back-up CRC

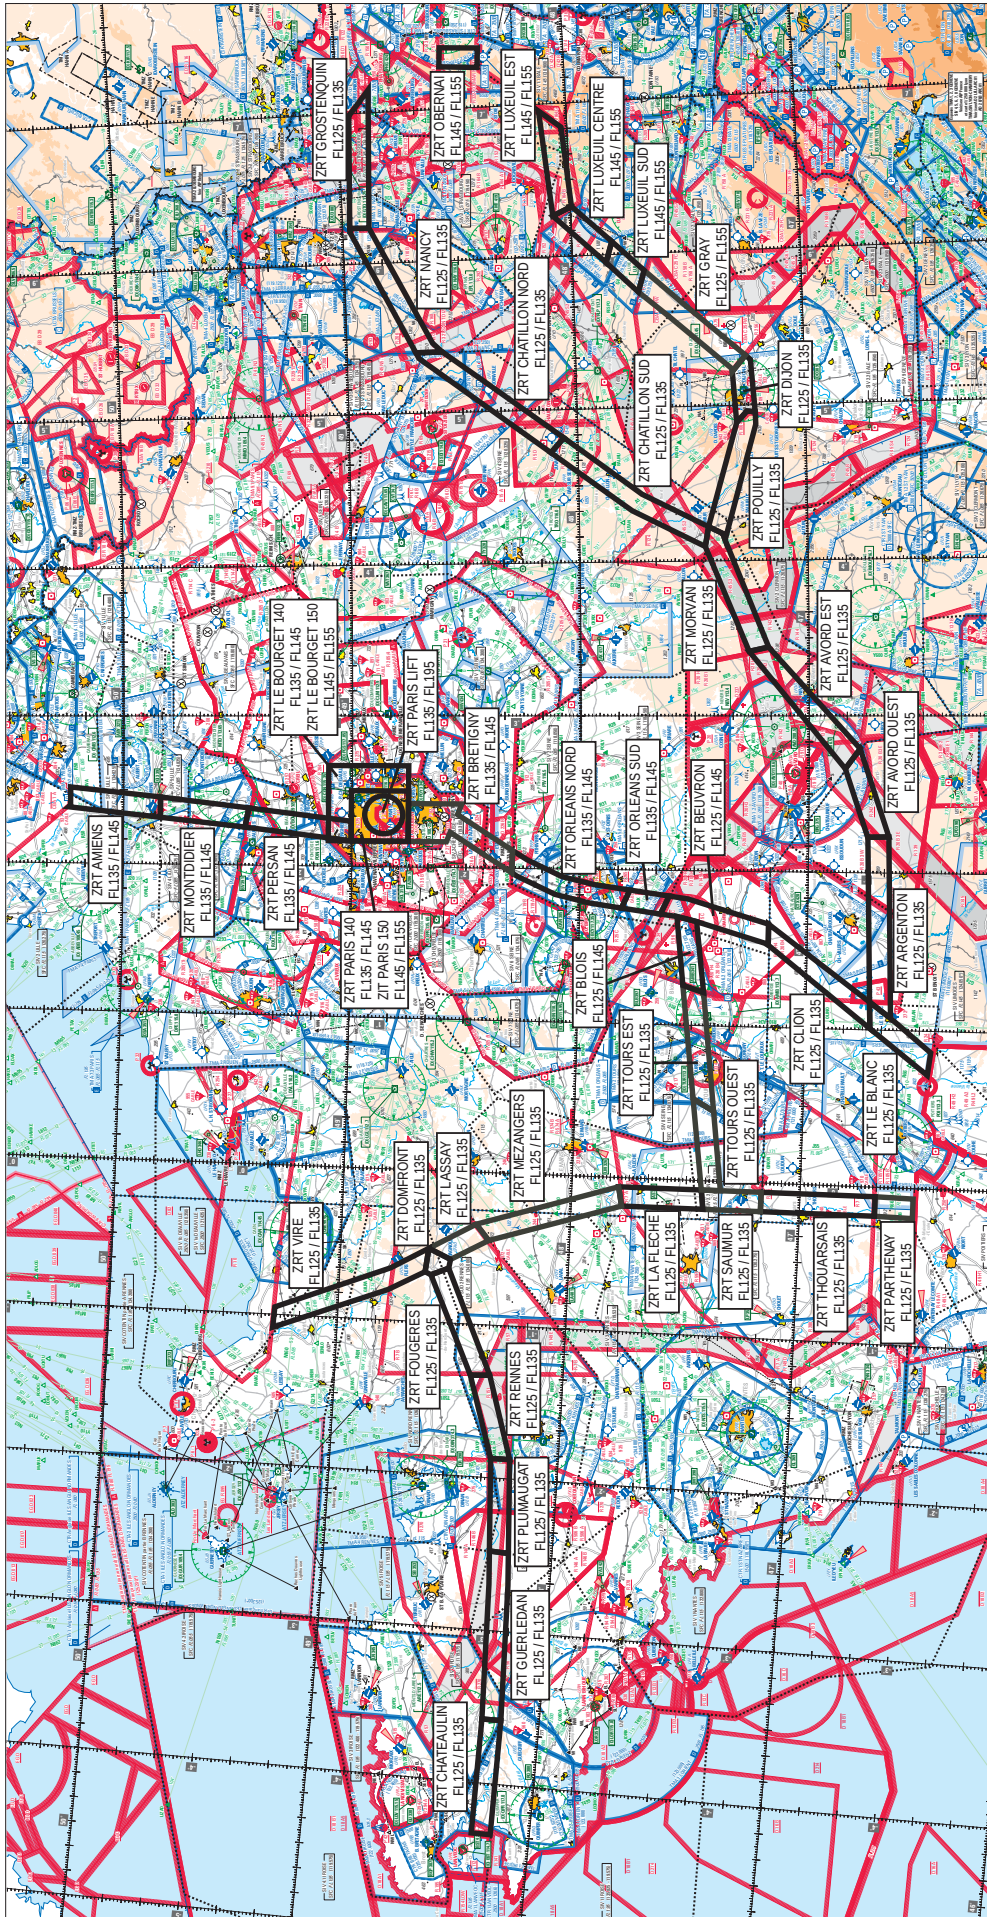
STATUS
Temporary Restricted Areas (ZRT) for the portion located within 12 NM from coasts (territorial waters limit), Temporary Danger Areas (ZDT) for the portion located beyond 12 NM from coasts (territorial waters limit).
These Areas coexist with the controlled airspace with which they overlap.

ENTRY CONDITIONS
For the ZRTs : GAT/OAT : entry after coordination.
For the ZDTs : airspace users must be aware of the particularly dangerous nature of the activities taking place in these Areas. Therefore, during the activity time slots, it is highly recommended to avoid entering these Areas

SERVICES PROVIDED
OAT: all OAT services are provided.
GAT: within the ZRTs and ZDTs, the usual ATS units keep providing, to ACFT cleared into these Areas, the services associated with the airspace with which these Areas coexist.

RELEVANT AUTHORITIES CONTACT DETAILS
Before Operation :
For Air Policing (PPS - « Posture Permanente de Sécurité ») only : « Commandement de la Défense Aérienne et des Opérations Aériennes - Lyon / Division DPSA » Phone : +33(0)4 87 65 52 24 or +33(0)4 87 65 50 86 / PNIA : 864 942 6224 or 864 942 7086
For exercises or trainings : « Commandement de la Défense Aérienne et des Opérations Aériennes / EMO / A7 - Lyon / Division Espaces Aériens » Phone : +33(0)4 87 65 57 98 or +33(0)4 87 65 57 99 / PNIA : 864 942 4798 or 864 942 4799
For Air Policing, exercises or training : « Escadron de drones - Cognac / Cellule Opérations » Phone : +33(0)5 16 45 01 00 / PNIA : 811 709 6303
Before Operation :
MIL CTL and Reporting Centre (CRC) of Cinq-Mars-la-Pile - Phone : +33(0)2 47 96 28 63 (back up : +33(0)2 47 96 30 00) MIL CTL and Reporting Centre (CRC) of Mont-de-Marsan - Phone : +33(0)5 58 05 49 03 Air Policing over Paris : « Élément Air de CTL de l'Aéroport Paris CDG (EACA) » - Phone : +33(0)6 72 79 62 42 or +33(0)1 48 16 65 37

Medium Altitude (MA) corridor overview



Medium Altitude (MA) North-Western corridors

ZRT Parthenay



LATERAL AND VERTICAL LIMITS

46°30'00"N - 000°11'33"W
 46°30'00"N - 000°04'06"W
 46°40'00"N - 000°03'46"W
 46°40'00"N - 000°11'13"W
 46°30'00"N - 000°11'33"W
 FL125/ FL135

USER INFORMATION

Actual time slots provided by :

Cognac APP : 132.450 MHz
 Poitiers Info: 124.000 MHz
 Bordeaux CTL : 127.675 MHz,
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC (Control and Reporting Centre) or back-up CRC.

ZRT Thouarsais



LATERAL AND VERTICAL LIMITS

47°10'00" N - 000°11'13" W
 47°10'00" N - 000°03'46" W
 46°40'00" N - 000°03'46" W
 46°40'00" N - 000°11'13" W
 47°10'00" N - 000°11'13" W

FL125/ FL135

USER INFORMATION

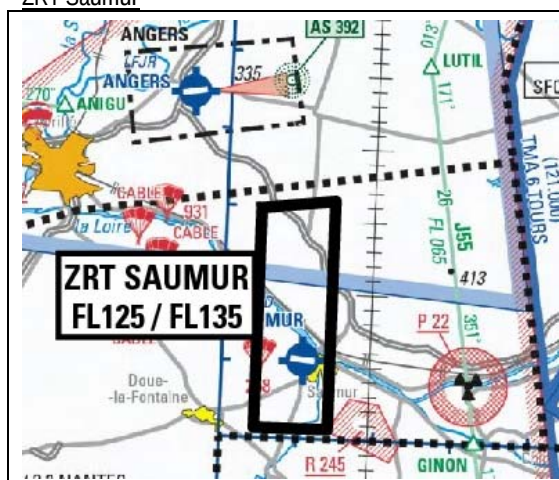
Actual time slots provided by :

Poitiers INFO : 124.000 MHz
 Bordeaux CTL : 127.675 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Saumur



LATERAL AND VERTICAL LIMITS

47°25'08" N - 000°11'13" W
 47°25'45" N - 000°03'46" W
 47°20'44" N - 000°03'46" W
 47°10'00" N - 000°03'46" W
 47°10'00" N - 000°11'13" W
 47°25'08" N - 000°11'13" W

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Nantes APP : 124.250 MHz
 Poitiers INFO : 124.000 MHz
 Paris CTL : 122.575 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT La Flèche



LATERAL AND VERTICAL LIMITS

47°46'32" N - 000°11'13" W
 47°47'29" N - 000°03'46" W
 47°25'45" N - 000°03'46" W
 47°25'08" N - 000°11'13" W
 47°46'32" N - 000°11'13" W

FL125/ FL135

USER INFORMATION

Actual time slots provided by :

Paris CTL : 122.575 MHz

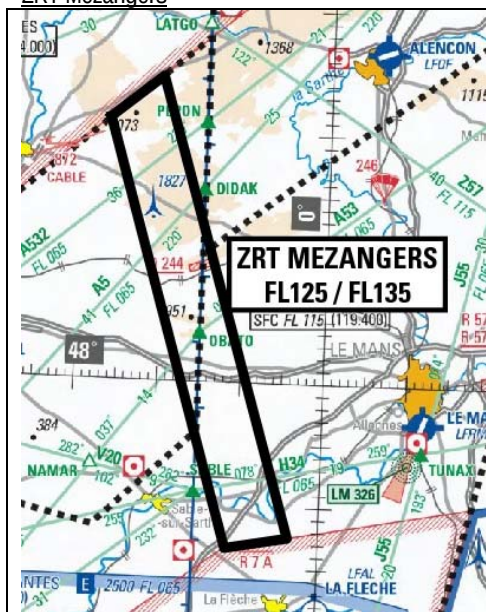
Nantes INFO : 119.400 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Mézangers



LATERAL AND VERTICAL LIMITS

48°21'02" N - 000°26'54" W
 48°24'28" N - 000°20'41" W
 47°47'29" N - 000°03'46" W
 47°46'32" N - 000°11'13" W
 48°21'02" N - 000°26'54" W

FL125/ FL135

USER INFORMATION

Actual time slots provided by :

Nantes APP : 119.535 MHz

Paris CTL : 122.575 MHz, 124.850 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Lassay



LATERAL AND VERTICAL LIMITS

48°36'38" N - 000°31'01" W
 48°30'49" N - 000°35'01" W
 48°21'02" N - 000°26'54" W
 48°24'28" N - 000°20'41" W
 48°36'38" N - 000°31'01" W

FL125/ FL135

USER INFORMATION

Actual time slots provided by :

Rennes APP : 134.000 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Domfront



LATERAL AND VERTICAL LIMITS

48°37'21" N - 000°40'21" W
 48°36'38" N - 000°31'01" W
 48°30'49" N - 000°35'01" W
 48°31'12" N - 000°38'31" W
 48°35'46" N - 000°41'26" W
 48°37'21" N - 000°40'21" W
 FL125/ FL135

USER INFORMATION

Actual time slots provided by :

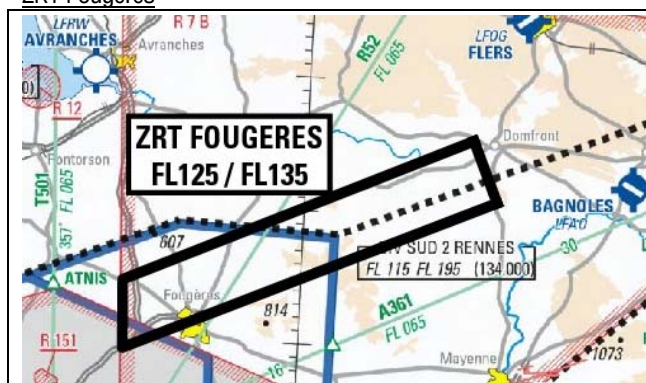
Rennes APP : 134.000 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Fougerès



LATERAL AND VERTICAL LIMITS

48°24'06" N - 001°20'15" W
 48°35'46" N - 000°41'26" W
 48°31'12" N - 000°38'31" W
 48°19'00" N - 001°19'53" W
 48°24'06" N - 001°20'15" W

FL125/ FL 135

USER INFORMATION

Actual time slots provided by :

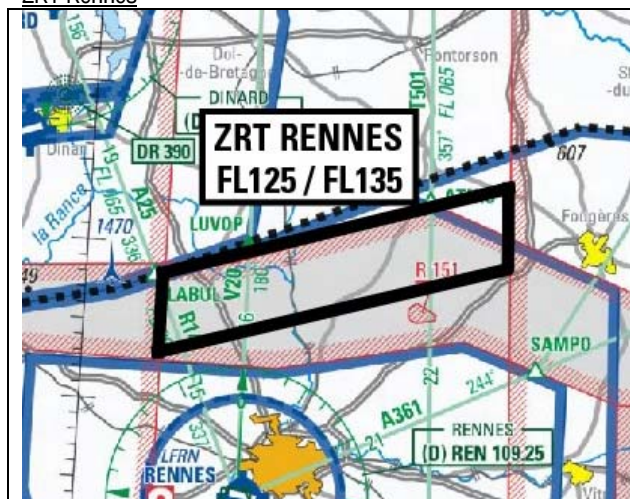
Rennes APP : 134.000 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Rennes



LATERAL AND VERTICAL LIMITS

48°24'06" N - 001°20'15" W
 48°19'00" N - 001°19'53" W
 48°12'30" N - 001°52'32" W
 48°17'30" N - 001°52'32" W
 48°24'06" N - 001°20'15" W

FL125/ FL 135

USER INFORMATION

Actual time slots provided by :

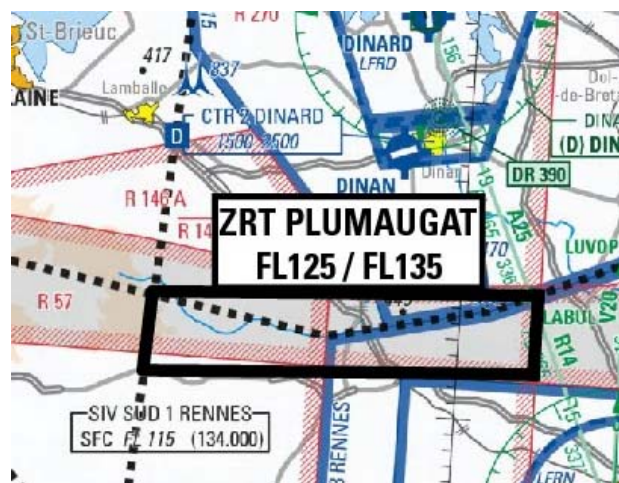
Rennes APP : 134.000 MHz

ARMOR : 124.725 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Plumaugat

LATERAL AND VERTICAL LIMITS	
48°16'14" N - 002°28'54" W	
48°17'30" N - 001°52'32" W	
48°12'30" N - 001°52'32" W	
48°11'13" N - 002°29'22" W	
48°16'14" N - 002°28'54" W	
FL125/ FL 135	
USER INFORMATION	
Actual time slots provided by :	
Rennes APP :	134.000 MHz
ARMOR :	124.725 MHz
RAKI (Cinq Mars la Pile CRC) :	119.700 MHz, 143.550 MHz, 317.500 MHz
MANAGING AUTHORITY	
Cinq-Mars-la-Pile CRC or back-up CRC.	

ZRT Guerlédan

LATERAL AND VERTICAL LIMITS	
48°14'50" N - 003°35'00" W	
48°15'44" N - 002°42'00" W	
48°16'14" N - 002°28'54" W	
48°11'13" N - 002°29'22" W	
48°10'44" N - 002°42'00" W	
48°09'50" N - 003°35'00" W	
48°14'50" N - 003°35'00" W	
FL125/ FL 135	
USER INFORMATION	
Actual time slots provided by :	
Iroise APP :	119.575 MHz
ARMOR :	124.725 MHz
Lorient APP :	123.000 MHz
Landivisiau APP :	122.400 MHz
RAKI (Cinq Mars la Pile CRC) :	119.700 MHz, 143.550 MHz, 317.500 MHz
MANAGING AUTHORITY	
Cinq-Mars-la-Pile CRC or back-up CRC.	

ZRT Châteaulin**LATERAL AND VERTICAL LIMITS**

48°10'00" N - 004°20'00" W
 48°15'00" N - 004°20'00" W
 48°14'50" N - 003°35'00" W
 48°09'50" N - 003°35'00" W
 48°10'00" N - 004°20'00" W

FL125/ FL 135

USER INFORMATION

Actual time slots provided by :

Iroise APP : 119.575 MHz
 ARMOR : 124.725 MHz
 Lorient APP : 123.000 MHz
 Landivisiau APP : 122.400 MHz
 Lanvéoc APP : 120.600 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Vire**LATERAL AND VERTICAL LIMITS**

49°16'37" N - 001°05'25" W
 49°16'19" N - 000°57'14" W
 48°46'26" N - 000°39'26" W
 48°36'38" N - 000°31'01" W
 48°37'21" N - 000°40'21" W
 48°46'54" N - 000°48'07" W
 49°16'37" N - 001°05'25" W

FL125/ FL 135

USER INFORMATION

Actual time slots provided by :

Rennes INFO : 134.200 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Tours Ouest**LATERAL AND VERTICAL LIMITS**

47°25'45" N - 000°03'46" W
 47°28'45" N - 000°31'29" E
 47°23'15" N - 000°26'48" E
 47°20'44" N - 000°03'46" W
 47°25'45" N - 000°03'46" W

FL125/FL135

INFORMATION DES USAGERS

Actual time slots provided by :

Tours APP : 121.000 MHz
 Nantes APP : 124.250 MHz
 Paris CTL : 118.725 MHz, 122.575 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Tours Est**LATERAL AND VERTICAL LIMITS**

47°28'45" N - 000°31'29" E
 47°32'14" N - 001°15'18" E
 47°26'44" N - 001°12'40" E
 47°23'15" N - 000°26'48" E
 47°28'45" N - 000°31'29" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

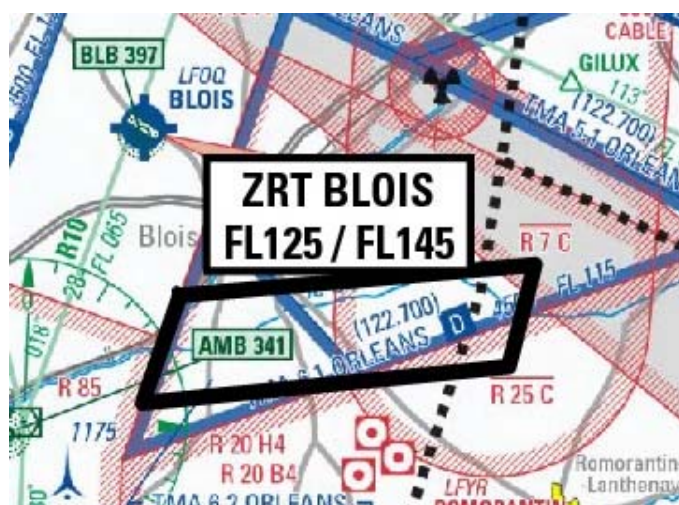
Tours APP : 121.000 MHz

Paris CTL : 118.725 MHz, 122.575 MHz

RAKI (Cinq-Mars-la-Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Blois**LATERAL AND VERTICAL LIMITS**

47°32'14" N - 001°15'18" E
 47°34'08" N - 001°41'57" E
 47°28'57" N - 001°40'07" E
 47°26'44" N - 001°12'40" E
 47°32'14" N - 001°15'18" E

FL125/FL145

USER INFORMATION

Actual time slots provided by :

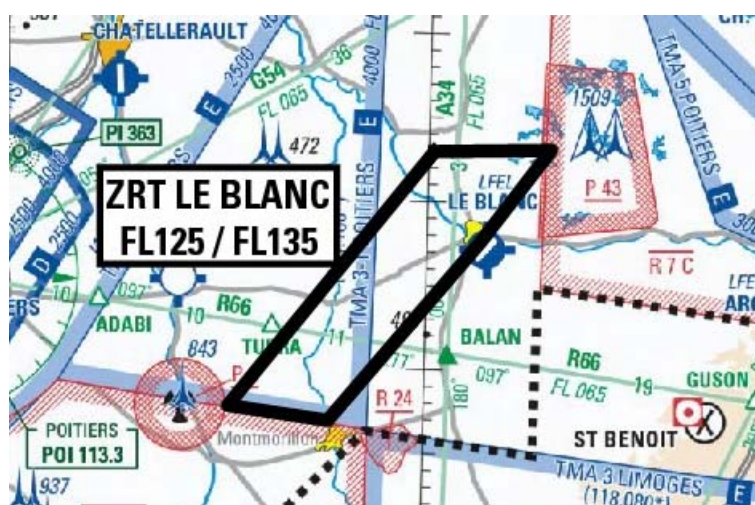
Brice APP : 122.700 MHz

Paris CTL : 118.725 MHz, 125.450 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Le Blanc**LATERAL AND VERTICAL LIMITS**

46°42'49" N - 001°00'22" E
 46°43'04" N - 001°10'29" E
 46°37'27" N - 001°04'29" E
 46°26'39" N - 000°51'43" E
 46°27'23" N - 000°43'05" E
 46°42'49" N - 001°00'22" E

FL125/ FL 135

USER INFORMATION

Actual time slots provided by :

Cognac APP : 132.450 MHz

Poitiers INFO : 124.000 MHz

Limoges INFO : 124.050 MHz

Bordeaux CTL : 127.675 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

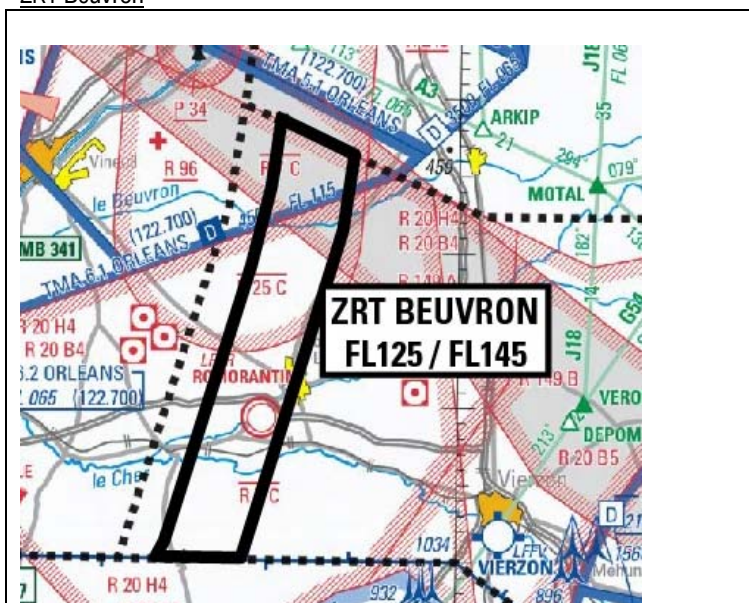
Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Clion



LATERAL AND VERTICAL LIMITS
47°10'00" N - 001°31'30" E 47°10'00" N - 001°39'35" E 46°43'04" N - 001°10'29" E 46°42'49" N - 001°00'22" E 47°10'00" N - 001°31'30" E FL125 / FL 135
USER INFORMATION
Actual time slots provided by : Poitiers INFO : 124.000 MHz Bordeaux CTL : 127.675 MHz RAKI (<i>Cinq Mars la Pile CRC</i>): 119.7 MHz, 143.550 MHz, 317.5 MHz
MANAGING AUTHORITY
Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Beuyron



LATERAL AND VERTICAL LIMITS	
	47°38'29" N - 001°42'48" E
	47°36'16" N - 001°49'51" E
	47°31'21" N - 001°48'51" E
	47°10'00" N - 001°39'35" E
	47°10'00" N - 001°31'30" E
	47°11'00" N - 001°32'16" E
	47°28'57" N - 001°40'07" E
	47°34'08" N - 001°41'57" E
	47°38'29" N - 001°42'48" E
FL125/FL145	
USER INFORMATION	
Actual time slots provided by :	
Bricy APP :	122.700 MHz
Poitiers INFO :	124.000 MHz
Paris CTL :	118.725 MHz, 125.450 MHz
RAKl (Cinq Mars la Pile CRC) :119.7 MHz, 143.550 MHz, 317.500 MHz	
MANAGING AUTHORITY	
Cinq-Mars-la-Pile CRC or back-up CRC.	

ZRT Orléans Sud



LATERAL AND VERTICAL LIMITS	
	47°48'45" N - 001°44'53" E
	47°46'37" N - 001°51'58" E
	47°36'16" N - 001°49'51" E
	47°38'29" N - 001°42'48" E
	47°48'45" N - 001°44'53" E
FL135/FL145	
USER INFORMATION	
Actual time slots provided by :	
Bricy APP :	122.700 MHz
Paris CTL :	118.725 MHz, 125.450 MHz
RAKI (<i>Cinq Mars la Pile CRC</i>) :	119.7 MHz, 143.550 MHz, 317.500 MHz
MANAGING AUTHORITY	
Cinq-Mars-la-Pile CRC or back-up CRC	

Paris Area corridors (for air policing only)

ZRT Orléans Nord (PPS)



LATERAL AND VERTICAL LIMITS

48°17'43" N - 001°58'05" E
 48°17'33" N - 002°06'49" E
 48°13'42" N - 002°03'16" E
 48°04'30" N - 001°56'51" E
 47°55'55" N - 001°53'53" E
 47°46'37" N - 001°51'58" E
 47°48'45" N - 001°44'53" E
 47°57'04" N - 001°46'39" E
 48°06'14" N - 001°49'50" E
 48°16'18" N - 001°56'47" E
 48°17'43" N - 001°58'05" E

FL135/FL145

USER INFORMATION

Actual time slots provided by :

Bricy APP : 122.700 MHz

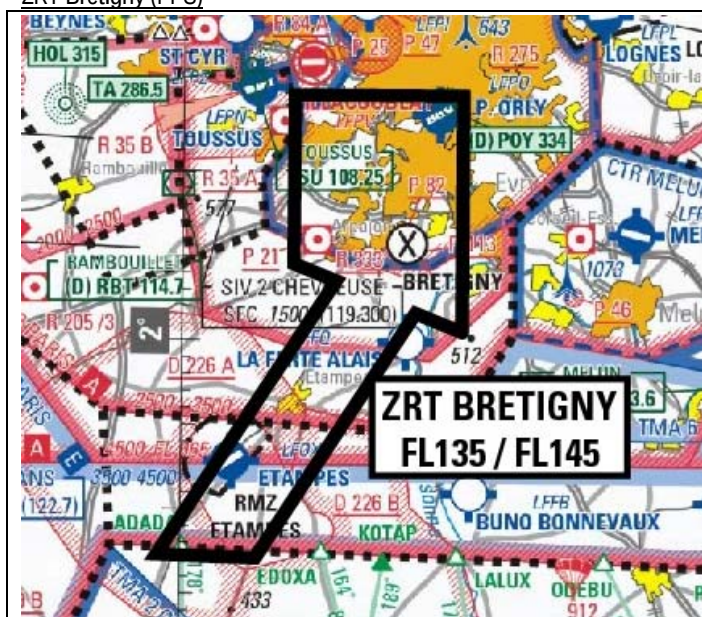
Paris CTL : 118.725 MHz, 125.450 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Brétigny (PPS)



LATERAL AND VERTICAL LIMITS

48°31'00" N - 002°25'00" E
 48°32'07" N - 002°20'51" E
 48°17'33" N - 002°06'49" E
 48°17'43" N - 001°58'05" E
 48°34'00" N - 002°13'46" E
 48°35'00" N - 002°10'00" E
 48°45'00" N - 002°10'00" E
 48°45'00" N - 002°25'00" E
 48°31'00" N - 002°25'00" E

FL135/FL145

USER INFORMATION

Actual time slots provided by :

Paris CTL : 124.630 MHz, 127.080 MHz, 135.405 MHz

Roissy CDG APP : 119.850 MHz,

Orly APP : 123.875 MHz, 127.750 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Élément Air de Contrôle de l'Aéroport Paris CDG / Roissy-EACA

ZRT Paris (PPS)



LATERAL AND VERTICAL LIMITS

48°45'00" N - 002°10'00" E
 49°00'00" N - 002°10'00" E
 49°00'00" N - 002°30'00" E
 48°45'00" N - 002°30'00" E
 48°45'00" N - 002°10'00" E

Paris 140 : FL135/145

Paris 150 : FL 145/155

USER INFORMATION

Actual time slots provided by :

Paris CTL : 124.630 MHz, 127.080 MHz, 135.405 MHz

Roissy CDG APP : 119.850 MHz,

Orly APP : 123.875 MHz, 127.750 MHz.

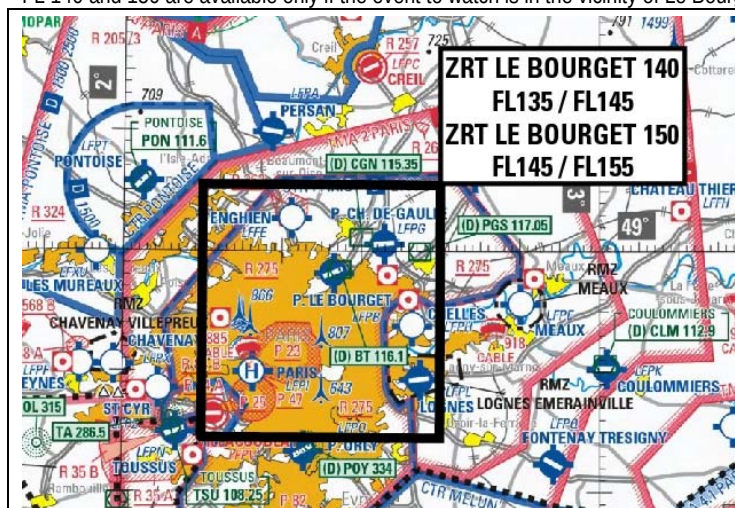
RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Élément Air de Contrôle de l'Aéroport Paris CDG / Roissy-EACA

ZRT Le Bourget (PPS)

FL 140 and 150 are available only if the event to watch is in the vicinity of Le Bourget (*Le Bourget air show, COP, « Conventions Villepinte » etc...*).

**LATERAL AND VERTICAL LIMITS**

48°45'00" N - 002°10'00" E
 49°06'00" N - 002°10'00" E
 49°06'00" N - 002°40'00" E
 48°45'00" N - 002°40'00" E
 48°45'00" N - 002°10'00" E

Le Bourget 140 : FL135/145
 Le Bourget 150 : FL 145/155

USER INFORMATION

Actual time slots provided by :

Paris CTL : 124.630 MHz, 127.080 MHz, 135.405 MHz
 Roissy CDG APP : 119.850 MHz,
 Orly APP : 123.875 MHz, 127.750 MHz.
 RAKI (Cinq Mars la Pile CRC): 119.7 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Élément Air de Contrôle de l'Aéroport Paris CDG / Roissy-EACA

ZRT Paris Lift (PPS)**LATERAL AND VERTICAL LIMITS**

Circle radius 5Nm centred at :
 48°51'30" N - 002°20'30" E

FL135/ FL195

USER INFORMATION

Actual time slots provided by :

Paris CTL : 124.630 MHz, 135.405 MHz, 120.950 MHz,
 136.375 MHz, 124.850 MHz
 De Gaulle APP : 119.850 MHz
 Orly APP : 123.875 MHz, 127.750 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz,
 317.500 MHz

MANAGING AUTHORITY

Élément Air de Contrôle de l'Aéroport Paris CDG / Roissy-EACA

ZRT Persan (PPS)**LATERAL AND VERTICAL LIMITS**

49°00'00" N - 002°10'00" E
 49°27'54" N - 002°15'05" E
 49°26'55" N - 002°22'48" E
 49°00'00" N - 002°17'48" E
 49°00'00" N - 002°10'00" E

FL135/FL145

USER INFORMATION

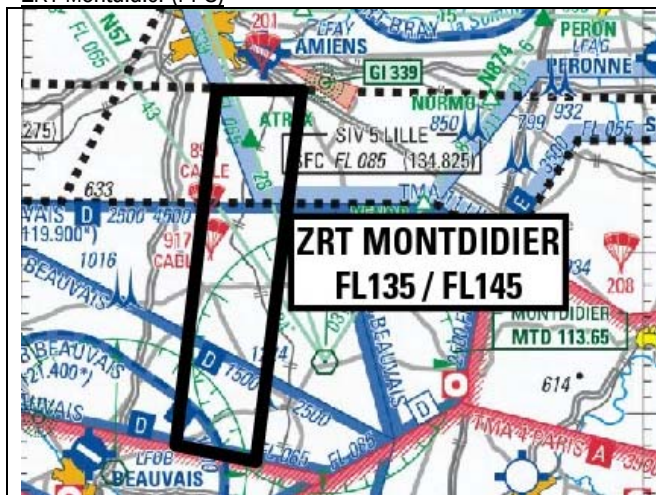
Actual time slots provided by :

Paris CTL : 135.550 MHz, 128.275 MHz,
 128.875 MHz, 124.630 MHz, 135.405 MHz
 Roissy CDG APP : 119.850 MHz,
 RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Élément Air de Contrôle de l'Aéroport Paris CDG / Roissy-EACA

ZRT Montdidier (PPS)



LATERAL AND VERTICAL LIMITS

49°50'07" N - 002°18'44" E
 49°50'07" N - 002°26'58" E
 49°26'55" N - 002°22'48" E
 49°27'54" N - 002°15'05" E
 49°50'07" N - 002°18'44" E

FL135/FL145

USER INFORMATION

Actual time slots provided by :

Paris CTL : 128.275 MHz, 135.550 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Amiens (PPS)



LATERAL AND VERTICAL LIMITS

50°14'11" N - 02°22'42" E
 50°13'42" N - 02°23'21" E
 50°13'42" N - 02°30'48" E
 49°50'07" N - 02°26'58" E
 49°50'07" N - 02°18'44" E
 50°14'11" N - 02°22'42" E

FL135/FL145

USER INFORMATION

Actual time slots provided by :

Paris CTL : 135.550 MHz, 128.275 MHz

RAKI (Cinq Mars la Pile CRC) : 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

North-Eastern corridors

ZRT Argenton



LATERAL AND VERTICAL LIMITS

46°43'04" N - 001°10'29" E
 46°44'12" N - 002°13'25" E
 46°38'41" N - 002°13'38" E
 46°37'27" N - 001°04'29" E
 46°43'04" N - 001°10'29" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Limoges INFO : 124.050 MHz
 Poitiers INFO : 124.000 MHz
 Bordeaux CTL : 127.675 MHz
 Avord APP : 119.700 MHz
 RAKI (Cinq Mars la Pile CRC): 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Avord Ouest



LATERAL AND VERTICAL LIMITS

46°44'16" N - 002°13'28" E
 46°50'16" N - 002°39'35" E
 46°46'22" N - 002°47'16" E
 46°38'41" N - 002°13'38" E
 46°44'16" N - 002°13'28" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Avord APP : 119.700 MHz
 Limoges INFO : 124.050 MHz
 Bordeaux CTL : 127.675 MHz
 RAKI (Cinq Mars la Pile CRC): 119.7 MHz, 143.550 MHz, 317.5 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Avord Est



LATERAL AND VERTICAL LIMITS

46°50'16" N - 002°39'35" E
 47°15'32" N - 003°24'44" E
 47°10'24" N - 003°26'21" E
 46°46'22" N - 002°47'16" E
 46°50'16" N - 002°39'35" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Avord APP : 119.700MHz
 Paris CTL : 125.450 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Morvan**LATERAL AND VERTICAL LIMITS**

47°15'32" N - 003°24'44" E
 47°26'48" N - 004°05'26" E
 47°25'52" N - 004°13'05" E
 47°22'09" N - 004°10'22" E
 47°21'34" N - 004°07'54" E
 47°10'24" N - 003°26'21" E
 47°15'32" N - 003°24'44" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

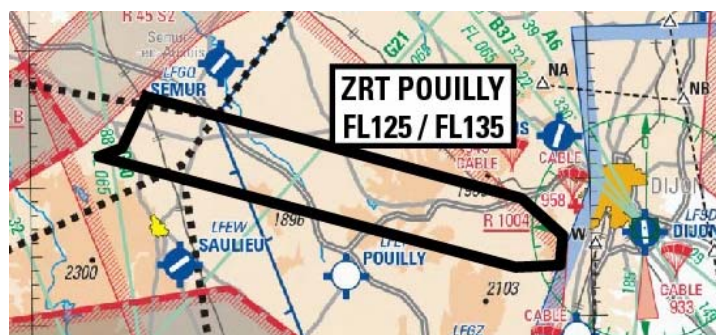
Avord APP : 119.700 MHz

Paris CTL : 125.450 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Pouilly**LATERAL AND VERTICAL LIMITS**

47°25'52" N - 004°13'05" E
 47°17'56" N - 004°53'10" E
 47°15'10" N - 004°57'30" E
 47°13'00" N - 004°57'08" E
 47°12'56" N - 004°52'22" E
 47°21'34" N - 004°07'54" E
 47°22'09" N - 004°10'22" E
 47°25'52" N - 004°13'05" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Bâle INFO : 135.850 MHz

Paris CTL : 125.025 MHz, 125.450 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Dijon**LATERAL AND VERTICAL LIMITS**

47°17'56" N - 004°53'10" E
 47°18'45" N - 005°12'51" E
 47°15'10" N - 005°19'03" E
 47°13'55" N - 005°17'24" E
 47°13'00" N - 004°57'08" E
 47°15'10" N - 004°57'30" E
 47°17'56" N - 004°53'10" E

FL125/FL135

USER INFORMATION

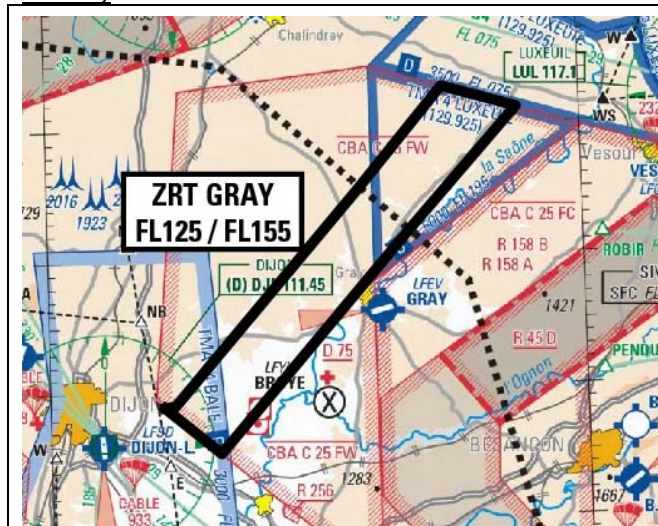
Actual time slots provided by :

Bâle INFO : 135.850 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Gray**LATERAL AND VERTICAL LIMITS**

47°18'45" N - 005°12'51" E
 47°18'51" N - 005°14'02" E
 47°35'08" N - 005°35'12" E
 47°42'46" N - 005°44'51" E
 47°41'03" N - 005°53'10" E
 47°31'50" N - 005°40'43" E
 47°15'10" N - 005°19'03" E
 47°18'45" N - 005°12'51" E

FL125/FL155

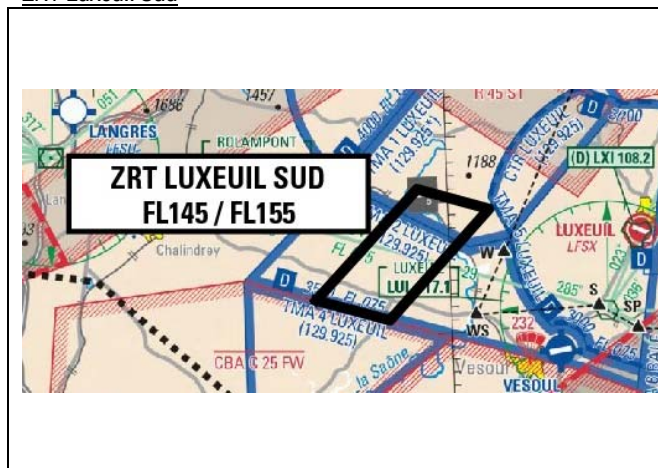
USER INFORMATION

Actual time slots provided by :

Luxeuil APP : 129.925 MHz
 Bâle INFO : 135.850 MHz
 Reims ACC (Sector SE) : 124.950 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Luxeuil Sud**LATERAL AND VERTICAL LIMITS**

47°42'46" N - 005°44'51" E
 47°50'59" N - 005°56'47" E
 47°49'16" N - 006°04'55" E
 47°41'03" N - 005°53'10" E
 47°42'46" N - 005°44'51" E

FL145/FL155

USER INFORMATION

Actual time slots provided by :

Reims ACC sector SE : 124.950 MHz
 Luxeuil APP : 129.925 MHz
 Bâle INFO : 135.850 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Luxeuil Centre**LATERAL AND VERTICAL LIMITS**

47°50'59" N - 005°56'47" E
 48°04'29" N - 006°15'47" E
 47°59'29" N - 006°19'12" E
 47°49'16" N - 006°04'55" E
 47°50'59" N - 005°56'47" E

FL145/FL155

USER INFORMATION

Actual time slots provided by :

Reims ACC sector SE : 124.950 MHz
 Luxeuil APP : 129.925 MHz
 Bâle INFO : 135.850 MHz
 Reims ACC (Sector SE) : 124.950 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Luxeuil Est**LATERAL AND VERTICAL LIMITS**

48°04'29" N - 006°15'47" E
 48°06'59" N - 006°57'07" E
 48°01'18" N - 006°50'26" E
 47°59'29" N - 006°19'12" E
 48°04'29" N - 006°15'47" E

FL145/FL155

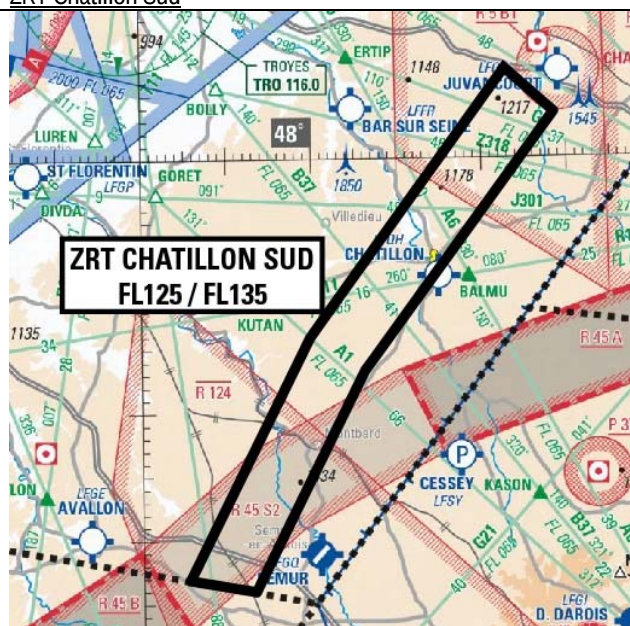
USER INFORMATION

Actual time slots provided by :

Reims ACC (sector E) : 128.300 MHz
 Luxeuil APP : 129.925 MHz
 Strasbourg INFO : 134.575 MHz
 Bâle INFO : 135.850 MHz
 Reims ACC (Sector SE) : 124.950 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Chatillon Sud**LATERAL AND VERTICAL LIMITS**

48°06'56" N - 004°43'04" E
 48°03'27" N - 004°48'46" E
 47°44'07" N - 004°27'08" E
 47°43'14" N - 004°26'08" E
 47°25'52" N - 004°13'05" E
 47°26'48" N - 004°05'26" E
 47°45'52" N - 004°19'46" E
 47°47'50" N - 004°21'54" E
 48°06'56" N - 004°43'04" E

FL125/FL135

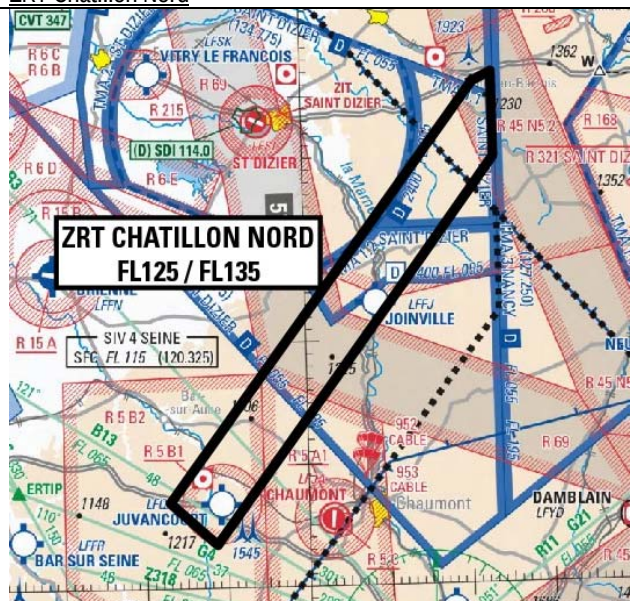
USER INFORMATION

Actual time slots provided by :

Paris CTL : 120.950 MHz, 125.080 MHz, 125.450 MHz,
 132.100 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Chatillon Nord**LATERAL AND VERTICAL LIMITS**

48°40'56" N - 05°21'30" E
 48°41'43" N - 05°23'50" E
 48°34'46" N - 05°23'50" E
 48°23'32" N - 05°11'13" E
 48°03'27" N - 04°48'46" E
 48°06'56" N - 04°43'04" E
 48°40'56" N - 05°21'30" E

FL125/FL135

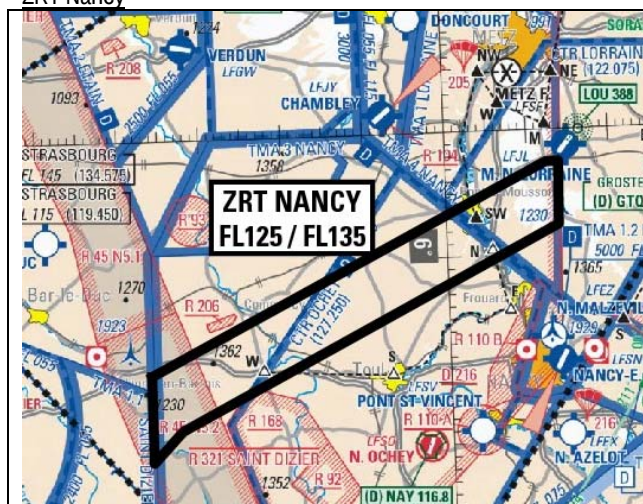
USER INFORMATION

Actual time slots provided by :

Saint Dizier APP : 134.775 MHz
 Strasbourg INFO : 134.575 MHz
 Paris CTL : 120.950 MHz, 125.080 MHz, 132.100 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Nancy**LATERAL AND VERTICAL LIMITS**

48°41'43" N - 005°23'50" E
 48°57'54" N - 006°12'36" E
 48°57'55" N - 006°14'08" E
 48°52'52" N - 006°13'56" E
 48°37'15" N - 005°27'24" E
 48°34'46" N - 005°23'50" E
 48°41'43" N - 005°23'50" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Ochey APP : 127.250 MHz

Strasbourg INFO : 134.575 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Grostenquin**LATERAL AND VERTICAL LIMITS**

48°57'55" N - 006°14'08" E
 48°56'49" N - 006°58'58" E
 48°51'25" N - 007°08'52" E
 48°52'52" N - 006°13'56" E
 48°57'55" N - 006°14'08" E

FL125/FL135

USER INFORMATION

Actual time slots provided by :

Ochey APP : 127.250 MHz

Strasbourg INFO : 134.575 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Obernai**LATERAL AND VERTICAL LIMITS**

48°22'32" N - 007°15'31" E
 48°32'32" N - 007°16'34" E
 48°32'09" N - 007°24'04" E
 48°22'09" N - 007°23'11" E
 48°22'32" N - 007°15'31" E

FL145/FL155

USER INFORMATION

Actual time slots provided by :

Reims ACC sector E : 128.300 MHz

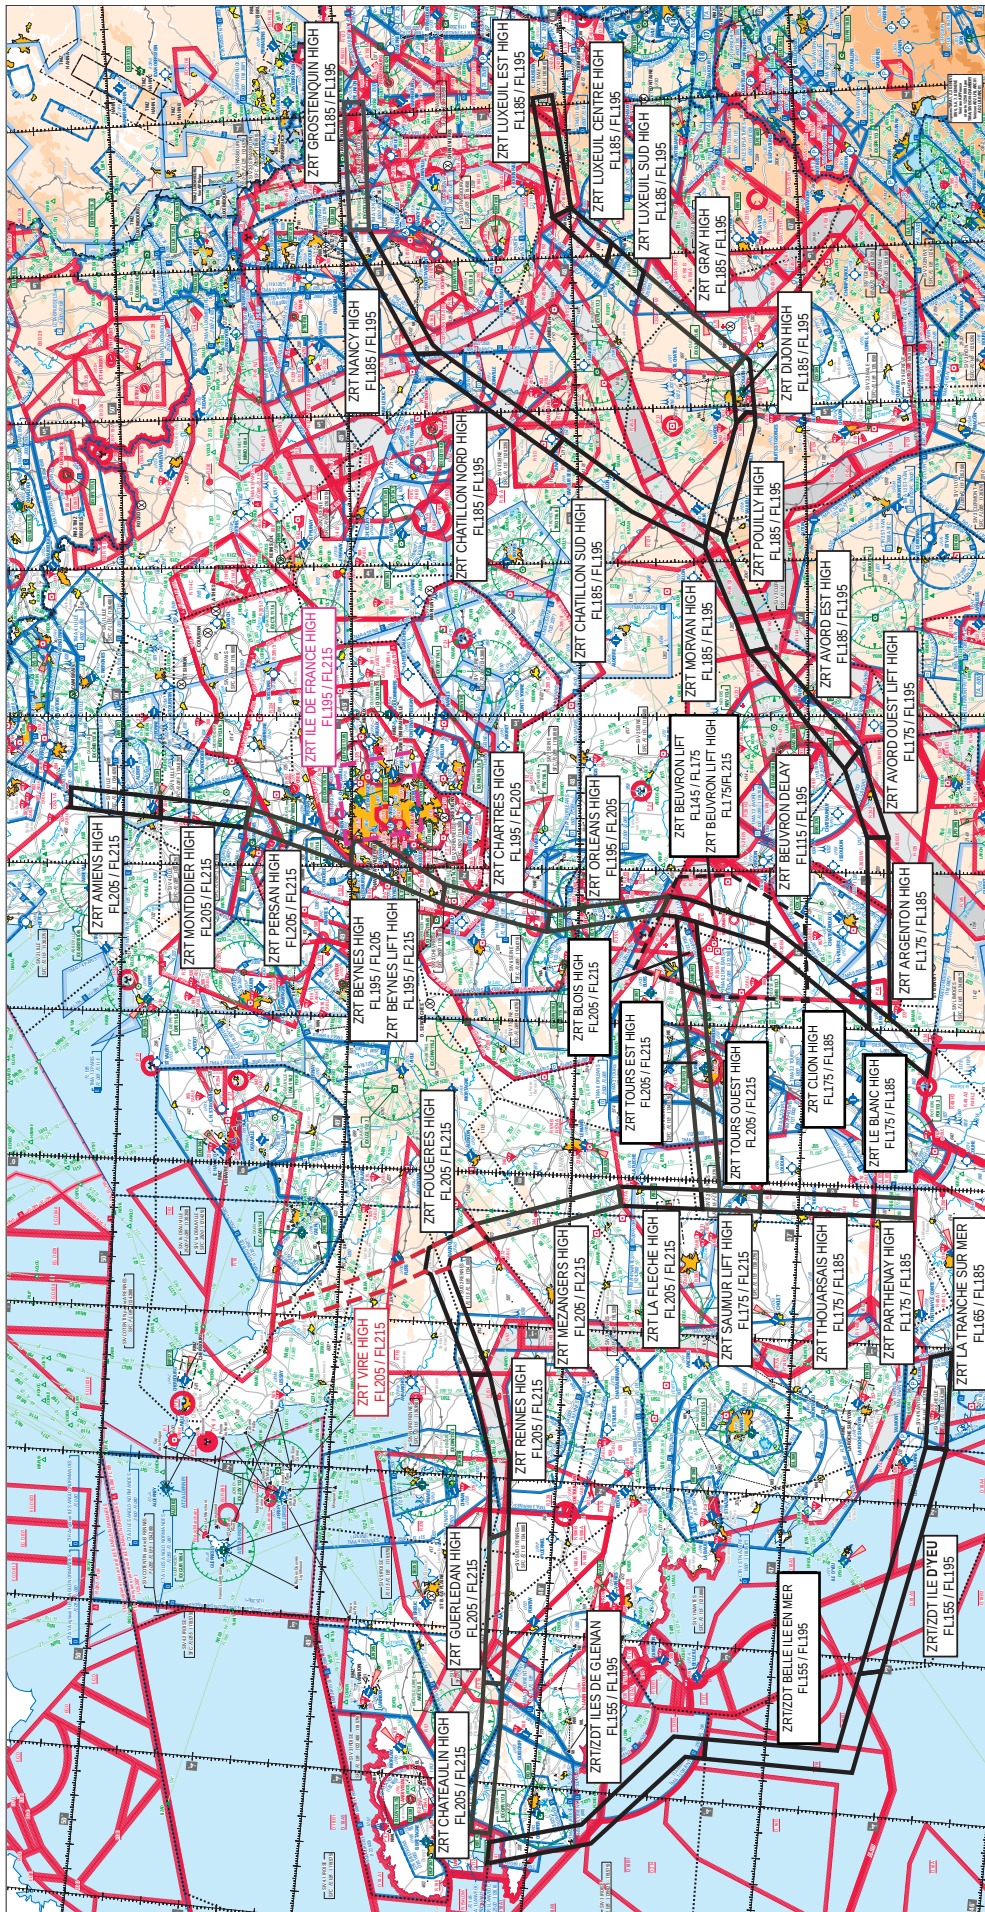
Strasbourg INFO : 120.700 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

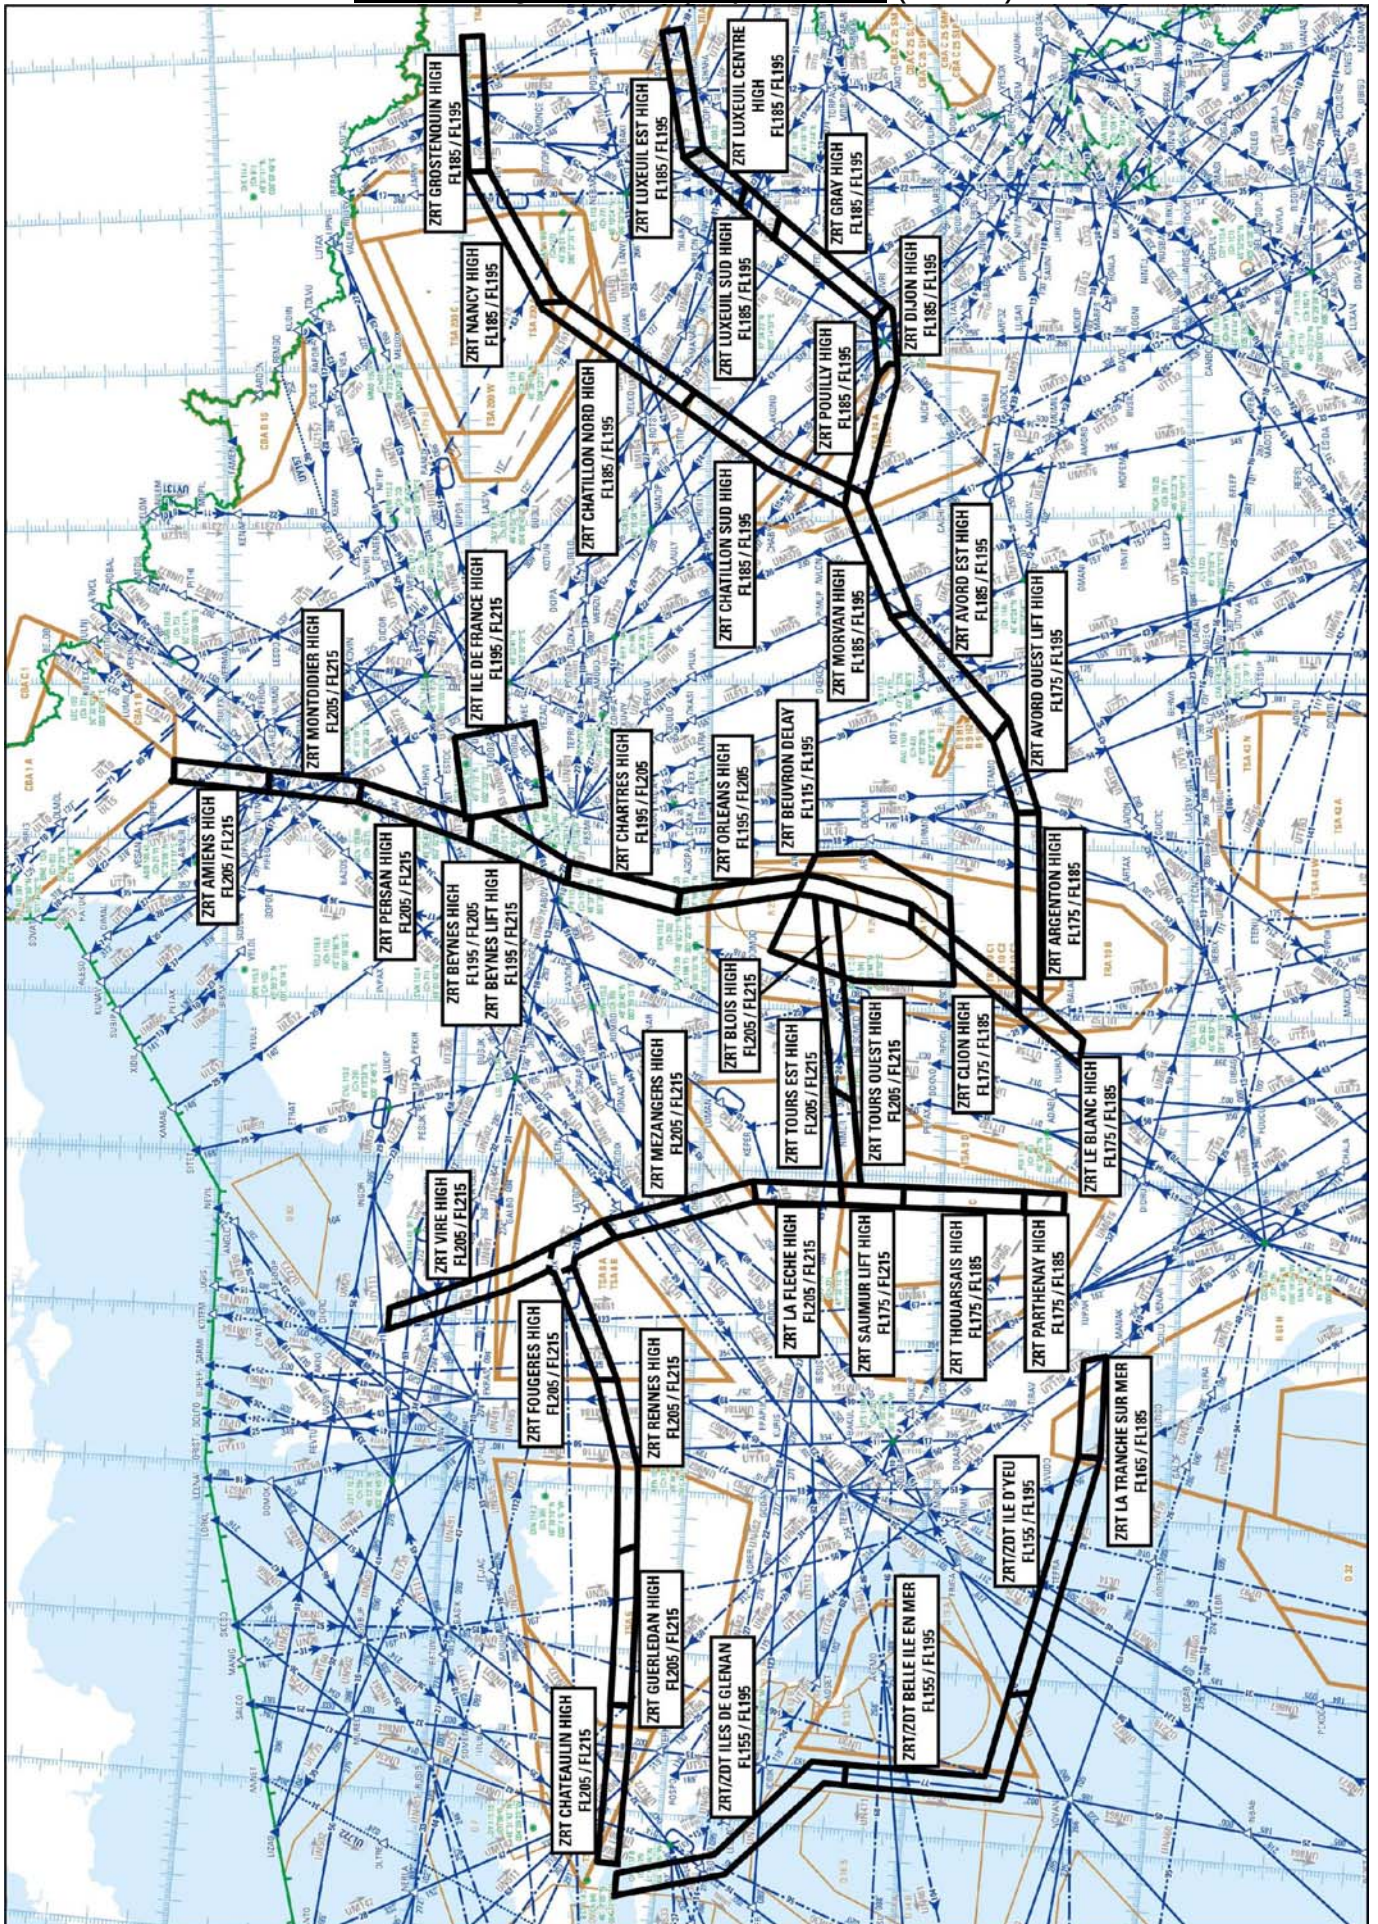
MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

Northern High Altitude (HA) corridors (1 / 1 000 000 SIA map)



Northern High Altitude (HA) corridors (ENR 6.2)



Western corridors

ZRT La Tranche sur Mer



LATERAL AND VERTICAL LIMITS

46°23'19" N - 001°38'21" W
 46°23'19" N - 001°04'00" W
 46°17'54" N - 001°01'52" W
 46°17'53" N - 001°38'39" W
 46°23'19" N - 001°38'21" W

FL165/ FL185

USER INFORMATION

Actual time slots provided by :

Bordeaux CTL : 127.675 MHz
 Nantes APP : 119.535 MHz
 ARMOR : 124.725 MHz
 MARINA (CDC de Mont-de-Marsan) : 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Mont-de-Marsan CRC or back up CRC

ZRT/ZDT Ile d'Yeu



LATERAL AND VERTICAL LIMITS

46°23'19" N - 001°38'21" W
 46°17'53" N - 001°38'39" W
 46°30'57" N - 003°04'34" W
 46°36'40" N - 003°06'11" W
 46°23'19" N - 001°38'21" W

FL155/ FL195

USER INFORMATION

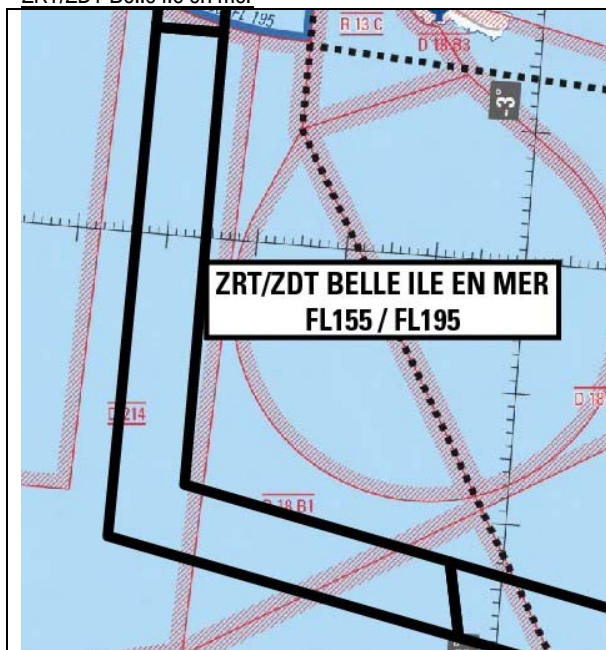
Actual time slots provided by :

Nantes APP : 119.535 MHz
 ARMOR : 124.725 MHz
 MARINA (Mont-de-Marsan CRC) : 143.550 MHz, 317.500 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT/ZDT Belle Ile en mer



LATERAL AND VERTICAL LIMITS

47°15'35" N - 003°43'34" W
 47°15'36" N - 003°36'00" W
 46°40'56" N - 003°36'08" W
 46°36'40" N - 003°06'11" W
 46°30'57" N - 003°04'34" W
 46°36'31" N - 003°44'07" W
 47°15'35" N - 003°43'34" W

FL155/ FL195

USER INFORMATION

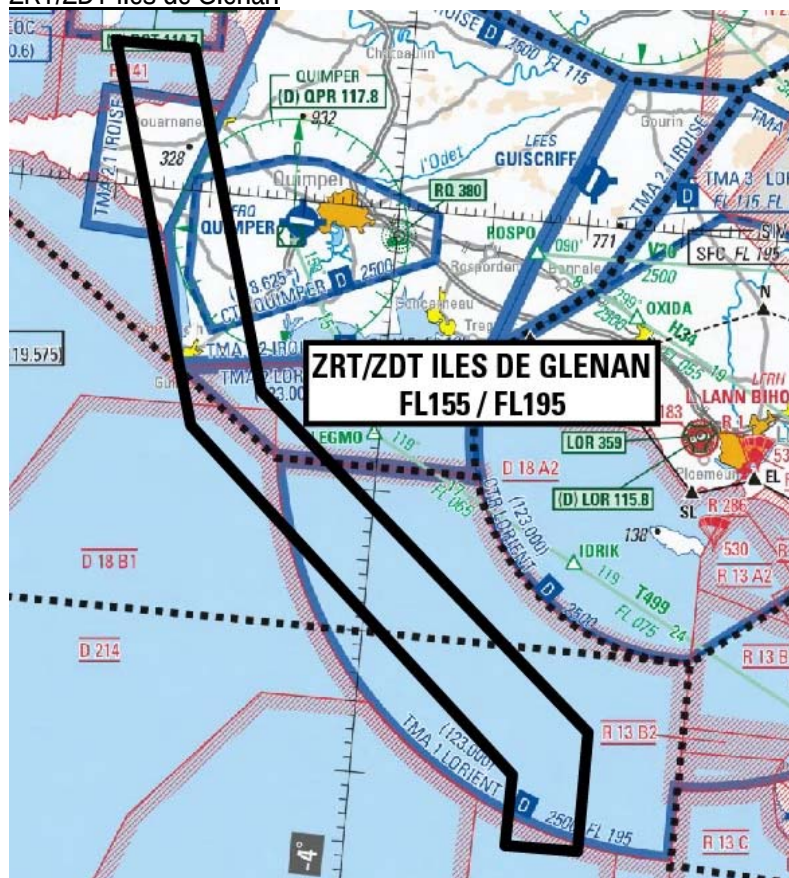
Actual time slots provided by :

Brest CTL sector AS : 124.675 MHz
 Lorient APP : 123.000 MHz
 ARMOR : 124.725 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT/ZDT Iles de Glénan



LATERAL AND VERTICAL LIMITS

48°10'00" N - 004°31'51" W
 48°10'00" N - 004°23'29" W
 47°46'14" N - 004°13'13" W
 47°24'04" N - 003°35'57" W
 47°15'36" N - 003°36'00" W
 47°15'35" N - 003°43'34" W
 47°20'37" N - 003°43'27" W
 47°43'19" N - 004°20'14" W
 48°10'00" N - 004°31'51" W

FL155/ FL195

USER INFORMATION

Actual time slots provided by :

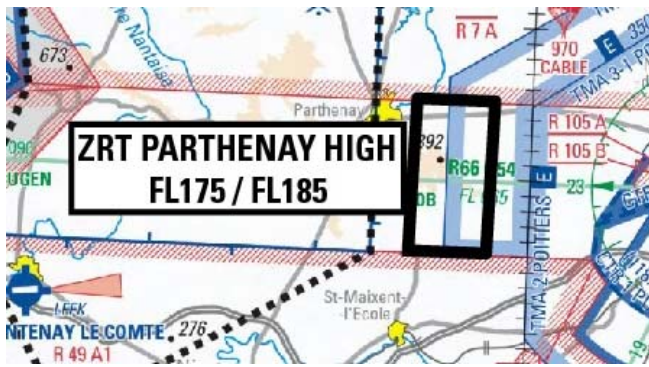
Iroise APP 119.575.MHz
 Lorient APP : 123.000 MHz
 Lanvéoc APP : 120.600 MHz
 ARMOR : 124.725 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

North-Western High Altitude (HA) Corridors

ZRT Parthenay High



LATERAL AND VERTICAL LIMITS

46°30'00"N - 000°11'33"W
 46°30'00"N - 000°04'06"W
 46°40'00"N - 000°03'46"W
 46°40'00"N - 000°11'13"W
 46°30'00"N - 000°11'33"W

FL175/FL185

USER INFORMATION

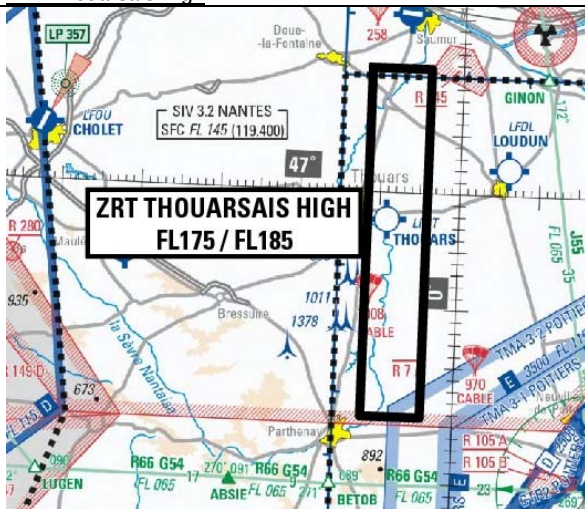
Actual time slots provided by :

Cognac APP : 132.450 MHz
 Bordeaux CTL : 127.675 MHz,
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Thouarsais High



LATERAL AND VERTICAL LIMITS

47°10'00" N - 000°11'13" W
 47°10'00" N - 000°03'46" W
 46°40'00" N - 000°03'46" W
 46°40'00" N - 000°11'13" W
 47°10'00" N - 000°11'13" W

FL175/FL185

USER INFORMATION

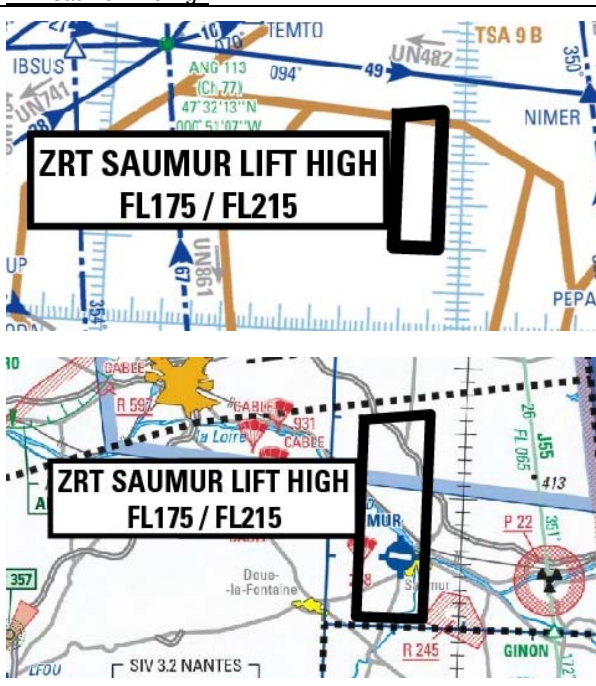
Actual time slots provided by :

Bordeaux CTL : 127.675 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Saumur Lift High



LATERAL AND VERTICAL LIMITS

47°25'08" N - 000°11'13" W
 47°25'45" N - 000°03'46" W
 47°20'44" N - 000°03'46" W
 47°10'00" N - 000°03'46" W
 47°10'00" N - 000°11'13" W
 47°25'08" N - 000°11'13" W

FL175/FL215

USER INFORMATION

Actual time slots provided by :

Paris CTL : 122.575 MHz, 132.265 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT La Flèche High**LATERAL AND VERTICAL LIMITS**

47°46'32" N - 000°11'13" W
 47°47'29" N - 000°03'46" W
 47°25'45" N - 000°03'46" W
 47°25'08" N - 000°11'13" W
 47°46'32" N - 000°11'13" W

FL205/FL215

USER INFORMATION

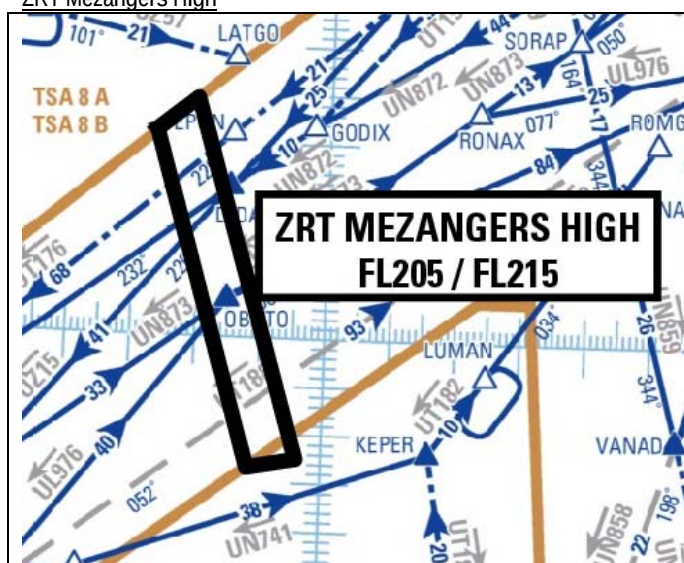
Actual time slots provided by :

Paris CTL : 122.575 MHz, 132.265 MHz

RAKI (Cinq Mars la Pile CRC) :119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Mézangers High**LATERAL AND VERTICAL LIMITS**

48°21'02" N - 000°26'54" W
 48°24'31" N - 000°20'44" W
 47°47'29" N - 000°03'46" W
 47°46'32" N - 000°11'13" W
 48°21'02" N - 000°26'54" W

FL205/FL215

USER INFORMATION

Actual time slots provided by :

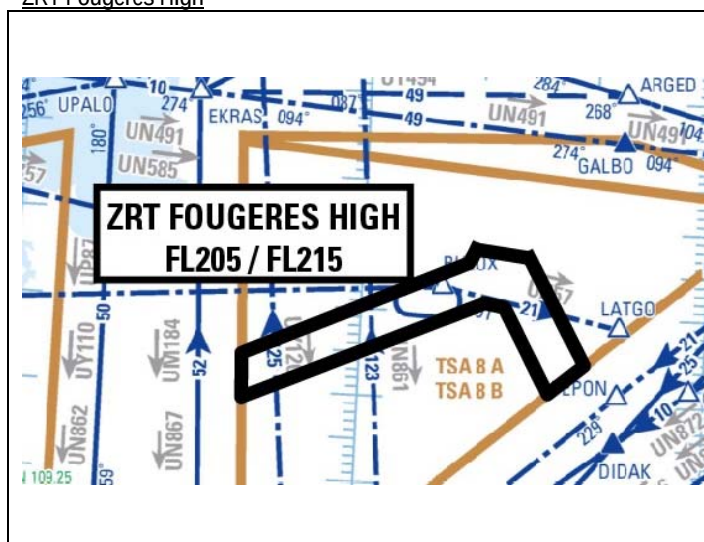
Paris CTL : 122.575 MHz, 124.850 MHz, 127.305 MHz

Brest CTL sector NS : 118.030 MHz

RAKI (Cinq Mars la Pile CRC) :119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Fougères High**LATERAL AND VERTICAL LIMITS**

48°36'38" N - 000°31'01" W
 48°37'21" N - 000°40'21" W
 48°35'46" N - 000°41'26" W
 48°24'06" N - 001°20'15" W
 48°19'00" N - 001°19'53" W
 48°31'12" N - 000°38'31" W
 48°30'49" N - 000°35'01" W
 48°21'02" N - 000°26'54" W
 48°24'31" N - 000°20'44" W
 48°36'38" N - 000°31'01" W

FL205/FL215

USER INFORMATION

Actual time slots provided by :

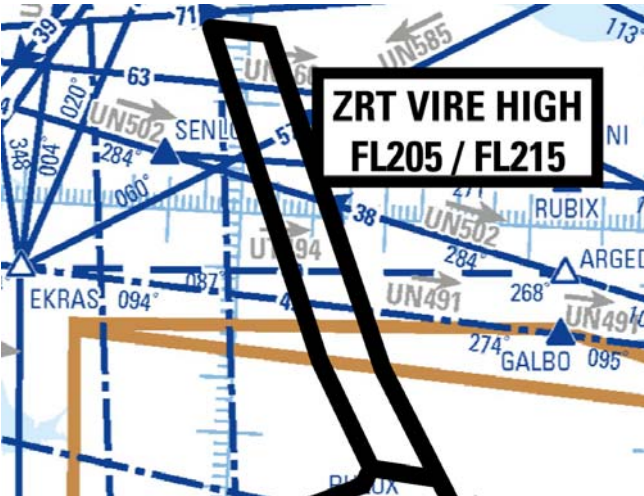
Brest CTL sector JS : 127.385 MHz

RAKI (Cinq Mars la Pile CRC) :119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Vire High

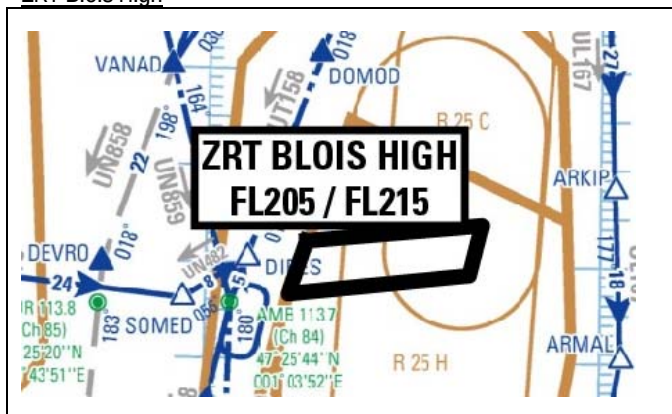
	LATERAL AND VERTICAL LIMITS
	49°16'37" N - 001°05'25" W 49°16'19" N - 000°57'14" W 48°46'26" N - 000°39'26" W 48°36'38" N - 000°31'01" W 48°24'31" N - 000°20'44" W 48°21'02" N - 000°26'54" W 48°30'49" N - 000°35'01" W 48°31'12" N - 000°38'31" W 48°35'46" N - 000°41'26" W 48°37'21" N - 000°40'21" W 48°46'54" N - 000°48'07" W 49°16'37" N - 001°05'25" W
	Excluding the portion overlapping with ZRT Fougères High when this ZRT is active
	FL205/FL215
	USER INFORMATION
	Actual time slots provided by : Brest Contrôle sector JS : 127.385 MHz RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz
	MANAGING AUTHORITY
	Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Tours Ouest High

	LATERAL AND VERTICAL LIMITS
	47°25'45" N - 000°03'46" W 47°28'45" N - 000°31'29" E 47°23'15" N - 000°26'48" E 47°20'44" N - 000°03'46" W 47°25'45" N - 000°03'46" W
	FL205/FL215
	USER INFORMATION
	Actual time slots provided by : Paris CTL : 127.305 MHz, 132.265 MHz RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz
	MANAGING AUTHORITY
	Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Tours Est High

	LATERAL AND VERTICAL LIMITS
	47°28'45" N - 000°31'29" E 47°32'14" N - 001°15'18" E 47°26'44" N - 001°12'40" E 47°23'15" N - 000°26'48" E 47°28'45" N - 000°31'29" E
	FL205/FL215
	USER INFORMATION
	Actual time slots provided by : Paris CTL : 127.305 MHz, 132.265 MHz RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz
	MANAGING AUTHORITY
	Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Blois High**LATERAL AND VERTICAL LIMITS**

47°32'14" N - 001°15'18" E
 47°34'08" N - 001°41'57" E
 47°28'57" N - 001°40'07" E
 47°26'44" N - 001°12'40" E
 47°32'14" N - 001°15'18" E

FL205/FL215

USER INFORMATION

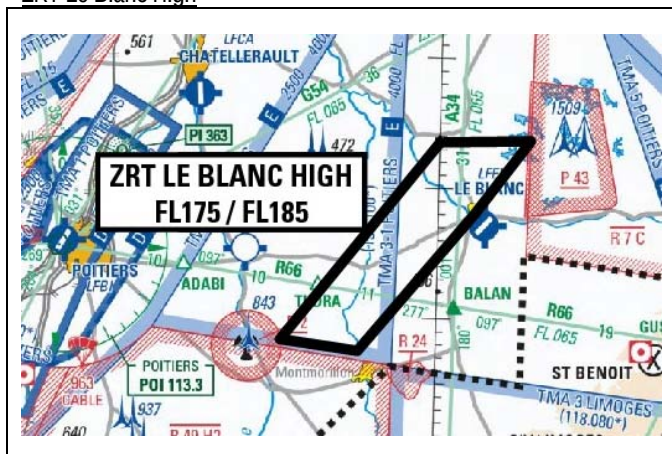
Actual time slots provided by :

Paris CTL : 127.305 MHz, 132.265 MHz, 124.630 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

Northern High Altitude (HA) CorridorsZRT Le Blanc High**LATERAL AND VERTICAL LIMITS**

46°42'49" N - 001°00'22" E
 46°43'04" N - 001°10'29" E
 46°37'27" N - 001°04'29" E
 46°26'39" N - 000°51'43" E
 46°27'23" N - 000°43'05" E
 46°42'49" N - 001°00'22" E

FL175/ FL185

USER INFORMATION

Actual time slots provided by :

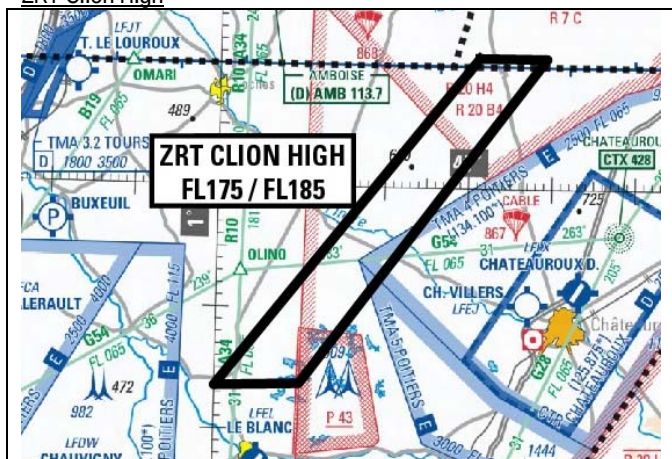
Cognac APP : 132.450 MHz

Bordeaux CTL : 127.675 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Clion High**LATERAL AND VERTICAL LIMITS**

47°10'00" N - 001°31'30" E
 47°10'00" N - 001°39'35" E
 46°43'04" N - 001°10'29" E
 46°42'49" N - 001°00'22" E
 47°10'00" N - 001°31'30" E

FL175/ FL185

USER INFORMATION

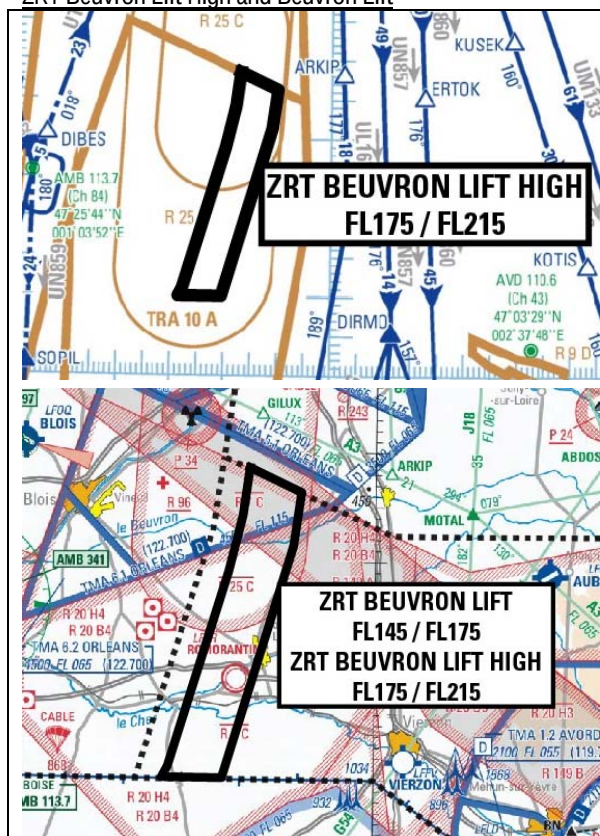
Actual time slots provided by :

Bordeaux CTL : 127.675 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Beuvron Lift High and Beuvron Lift**LATERAL AND VERTICAL LIMITS**

47°38'29" N - 001°42'48" E
 47°36'16" N - 001°49'51" E
 47°31'21" N - 001°48'51" E
 47°10'00" N - 001°39'35" E
 47°10'00" N - 001°31'30" E
 47°11'00" N - 001°32'16" E
 47°28'57" N - 001°40'07" E
 47°34'08" N - 001°41'57" E
 47°38'29" N - 001°42'48" E

Beuvron Lift : FL145/FL175

Beuvron Lift High : FL175/FL215

USER INFORMATION

Actual time slots provided by :

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

ZRT Beuvron Lift :

Bricy APP : 122.700 MHz

Poitiers INFO : 124.000 MHz

Paris CTL : 118.725 MHz, 125.450 MHz, 123.265 MHz

Bordeaux CTL : 127.675 MHz

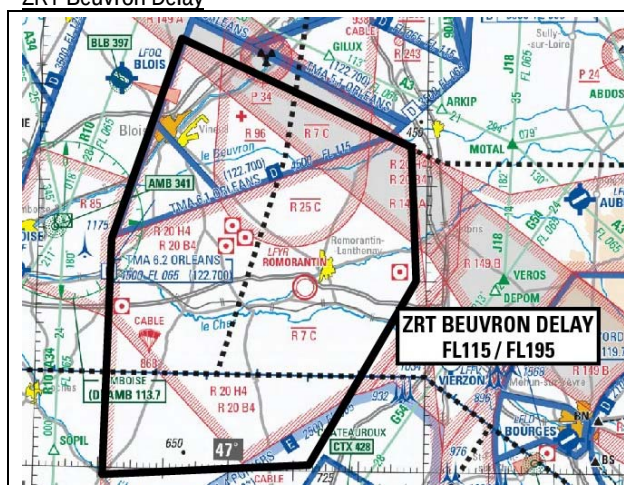
ZRT Beuvron Lift High :

Paris CTL : 118.725 MHz, 125.450 MHz, 124.630 MHz

Bordeaux CTL : 127.675 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Beuvron Delay**LATERAL AND VERTICAL LIMITS**

47°33'59" N - 001°57'28" E
 47°19'56" N - 001°58'28" E
 47°00'30" N - 001°42'20" E
 46°59'07" N - 001°10'38" E
 47°23'53" N - 001°11'17" E
 47°44'58" N - 001°21'31" E
 47°33'59" N - 001°57'28" E

FL115/ FL195

USER INFORMATION

Actual time slots provided by :

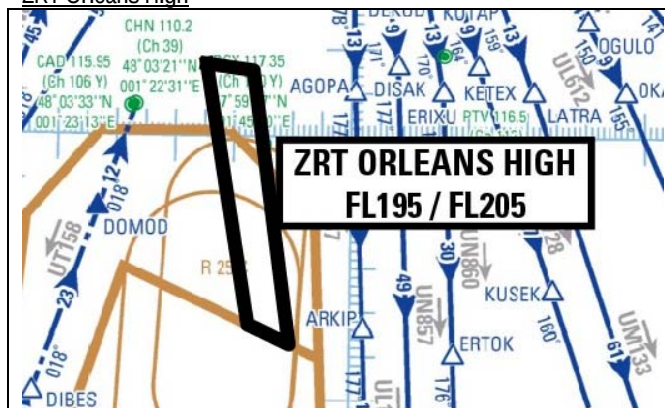
Bordeaux CTL : 127.675 MHz

Paris CTL : 118.725 MHz, 125.450 MHz, 135.405 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Orléans High**LATERAL AND VERTICAL LIMITS**

48°08'12" N - 001°35'10" E
 48°07'30" N - 001°43'11" E
 47°36'16" N - 001°49'51" E
 47°38'29" N - 001°42'48" E
 48°08'12" N - 001°35'10" E

FL195/ FL205

USER INFORMATION

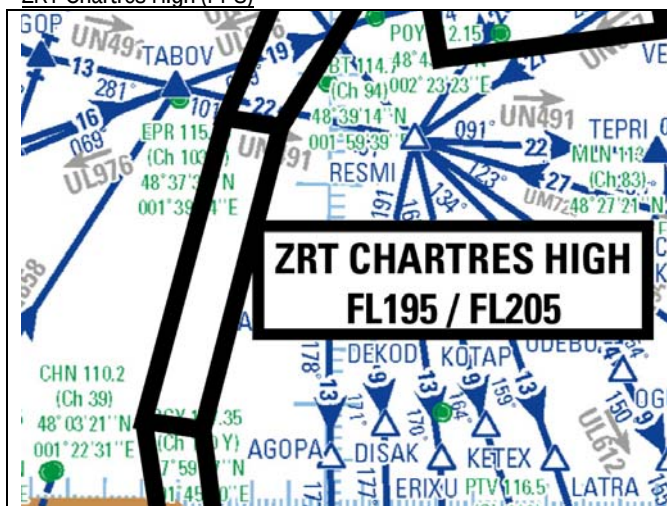
Actual time slots provided by :

Paris CTL : 132.265 MHz, 124.630 MHz, 124.450 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

HA Paris Area corridors (for air policing (PPS) only)ZRT Chartres High (PPS)**LATERAL AND VERTICAL LIMITS**

48°35'52" N - 001°45'34" E
 48°35'08" N - 001°53'13" E
 48°07'30" N - 001°43'11" E
 48°08'12" N - 001°35'10" E
 48°35'52" N - 001°45'34" E

FL195/ FL205

USER INFORMATION

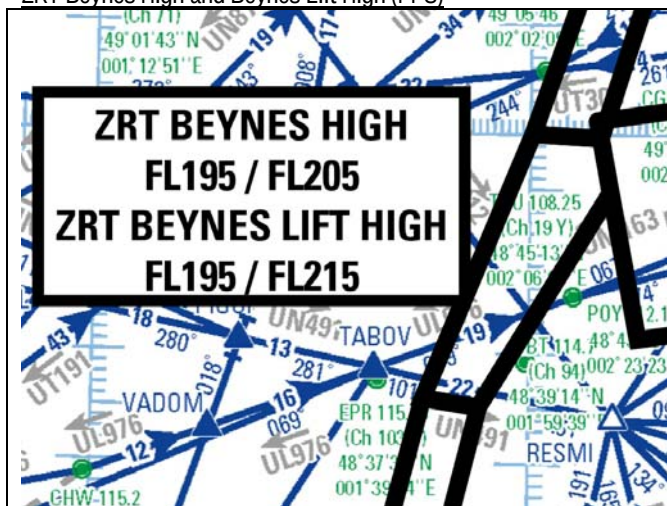
Actual time slots provided by :

Paris CTL : 118.725 MHz, 124.630 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Beynes High and Beynes Lift High (PPS)**LATERAL AND VERTICAL LIMITS**

49°00'00" N - 002°00'18" E
 48°59'41" N - 002°09'41" E
 48°54'44" N - 002°11'03" E
 48°35'08" N - 001°53'13" E
 48°35'52" N - 001°45'34" E
 49°00'00" N - 002°00'18" E

Beynes High : FL195/ FL205

Beynes Lift High : FL195/ FL215

USER INFORMATION

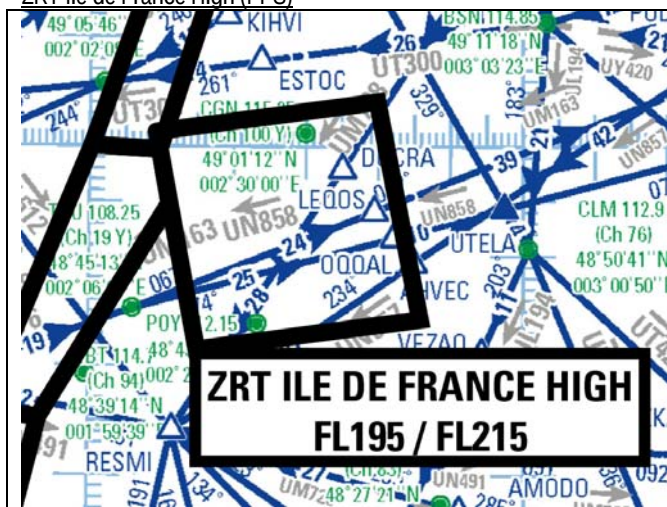
Actual time slots provided by :

Paris CTL : 124.630 MHz, 124.850 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC

ZRT Ile de France High (PPS)**LATERAL AND VERTICAL LIMITS**

49°01'16" N - 002°09'12" E
 49°04'04" N - 002°39'50" E
 48°44'13" N - 002°45'48" E
 48°41'26" N - 002°15'00" E
 49°01'16" N - 002°09'12" E

FL195/ FL215

USER INFORMATION

Actual time slots provided by :

Paris CTL : 124.630 MHz, 135.405 MHz, 120.950 MHz,
136.375 MHz, 124.850 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Persan High (PPS)**LATERAL AND VERTICAL LIMITS**

49°00'00" N - 002°00'18" E
 49°27'54" N - 002°15'05" E
 49°26'55" N - 002°22'48" E
 48°59'41" N - 002°09'41" E
 49°00'00" N - 002°00'18" E

FL205/FL215

USER INFORMATION

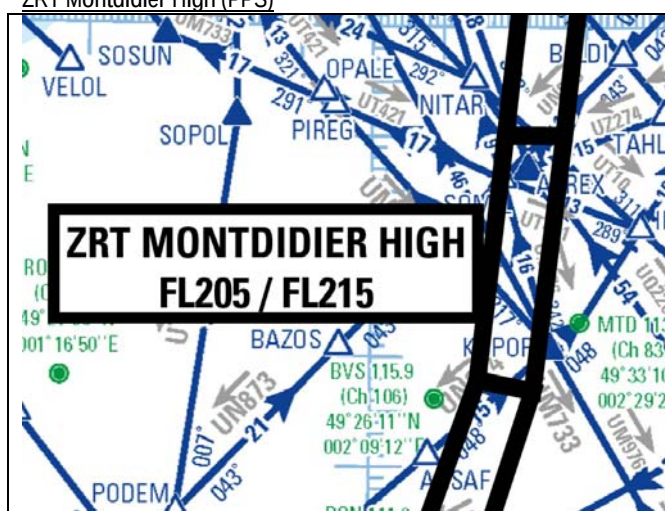
Actual time slots provided by :

Paris CTL : 124.850 MHz, 128.875 MHz, 135.550 MHz
 124.630 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Montdidier High (PPS)**LATERAL AND VERTICAL LIMITS**

49°50'07" N - 002°18'44" E
 49°50'07" N - 002°26'58" E
 49°26'55" N - 002°22'48" E
 49°27'54" N - 002°15'05" E
 49°50'07" N - 002°18'44" E

FL205/FL215

USER INFORMATION

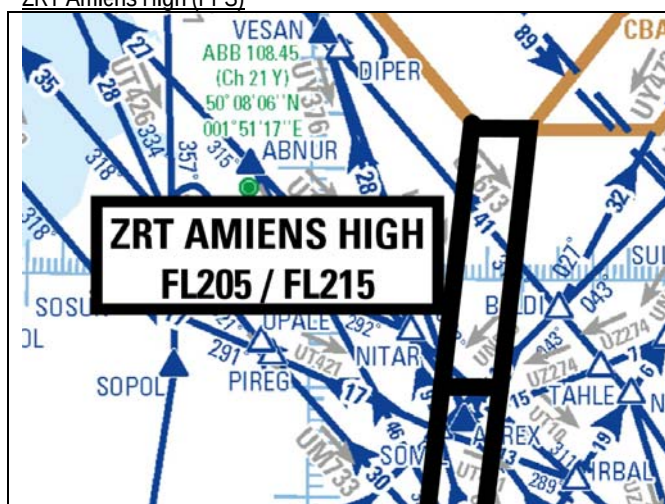
Actual time slots provided by :

Paris CTL : 128.875 MHz, 135.550 MHz, 128.875 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC

ZRT Amiens High (PPS)**LATERAL AND VERTICAL LIMITS**

50°14'11" N - 02°22'42" E
 50°13'42" N - 02°23'21" E
 50°13'42" N - 02°30'48" E
 49°50'07" N - 02°26'58" E
 49°50'07" N - 02°18'44" E
 50°14'11" N - 02°22'42" E

FL205/FL215

USER INFORMATION

Actual time slots provided by :

Paris CTL : 135.550 MHz, 128.875 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

HA North-Eastern Corridors

ZRT Argenton High



LATERAL AND VERTICAL LIMITS

46°43'04" N - 001°10'29" E
 46°44'12" N - 002°13'25" E
 46°38'41" N - 002°13'38" E
 46°37'27" N - 001°04'29" E
 46°43'04" N - 001°10'29" E

FL175/FL185

USER INFORMATION

Actual time slots provided by :

Bordeaux CTL : 127.675 MHz
 Avord APP : 119.700 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Avord Ouest Lift High



LATERAL AND VERTICAL LIMITS

46°44'16" N - 002°13'28" E
 46°50'16" N - 002°39'35" E
 46°46'22" N - 002°47'16" E
 46°38'41" N - 002°13'38" E
 46°44'16" N - 002°13'28" E

FL175/FL195

USER INFORMATION

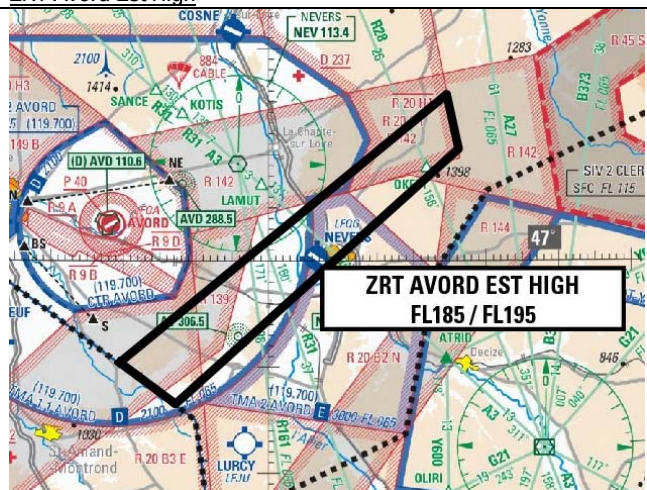
Actual time slots provided by :

Avord APP : 119.700 MHz
 Bordeaux CTL : 127.675 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Avord Est High



LATERAL AND VERTICAL LIMITS

46°50'16" N - 002°39'35" E
 47°15'32" N - 003°24'44" E
 47°10'24" N - 003°26'21" E
 46°46'22" N - 002°47'16" E
 46°50'16" N - 002°39'35" E

FL185/FL195

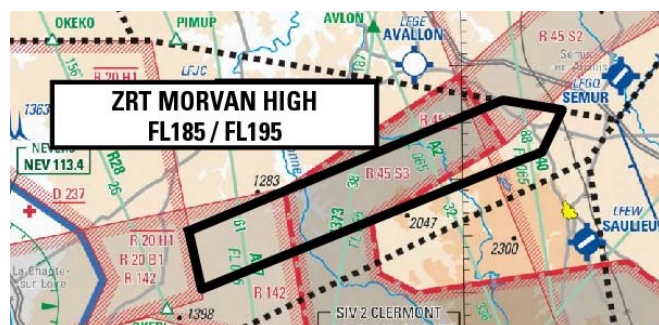
USER INFORMATION

Actual time slots provided by :

Avord APP : 119.700 MHz
 Paris CTL : 125.450 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Morvan High**LATERAL AND VERTICAL LIMITS**

47°15'32" N - 003°24'44" E
 47°26'48" N - 004°05'26" E
 47°25'52" N - 004°13'05" E
 47°22'09" N - 004°10'22" E
 47°21'34" N - 004°07'54" E
 47°10'24" N - 003°26'21" E
 47°15'32" N - 003°24'44" E

FL185/FL195

USER INFORMATION

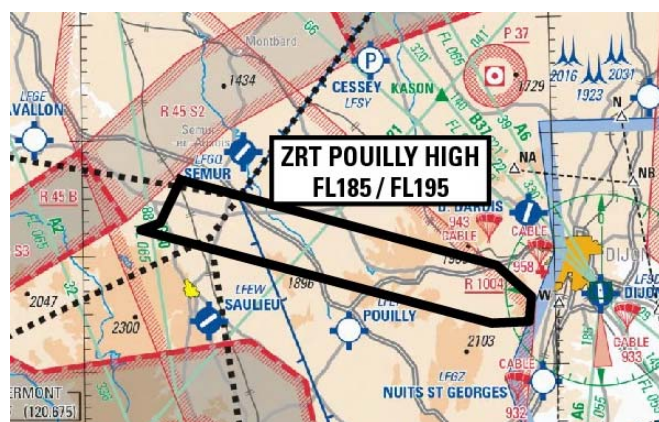
Actual time slots provided by :

Paris CTL : 125.450 MHz, 125.080 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Pouilly High**LATERAL AND VERTICAL LIMITS**

47°25'52" N - 004°13'05" E
 47°17'56" N - 004°53'10" E
 47°15'10" N - 004°57'30" E
 47°13'00" N - 004°57'08" E
 47°12'56" N - 004°52'22" E
 47°21'34" N - 004°07'54" E
 47°22'09" N - 004°10'22" E
 47°25'52" N - 004°13'05" E

FL185/FL195

USER INFORMATION

Actual time slots provided by :

Bâle INFO : 135.850 MHz

Paris CTL : 125.025 MHz, 125.450 MHz, 125.080 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Dijon High**LATERAL AND VERTICAL LIMITS**

47°17'56" N - 004°53'10" E
 47°18'45" N - 005°12'51" E
 47°15'10" N - 005°19'03" E
 47°13'55" N - 005°17'24" E
 47°13'00" N - 004°57'08" E
 47°15'10" N - 004°57'30" E
 47°17'56" N - 004°53'10" E

FL185/FL195

USER INFORMATION

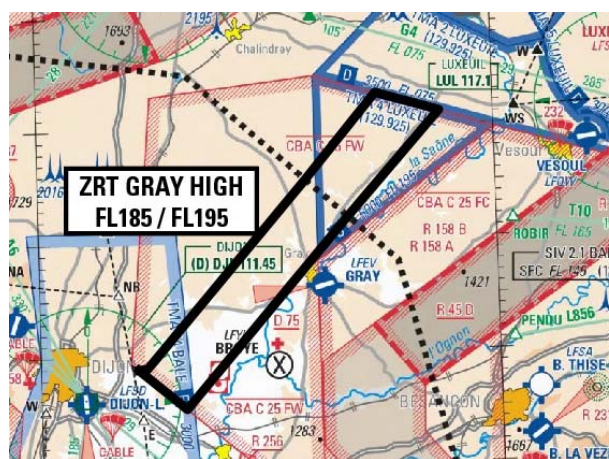
Actual time slots provided by :

Bâle INFO : 135.850 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Gray High**LATERAL AND VERTICAL LIMITS**

47°18'45" N - 005°12'51" E
 47°18'51" N - 005°14'02" E
 47°35'08" N - 005°35'12" E
 47°42'46" N - 005°44'51" E
 47°41'03" N - 005°53'10" E
 47°31'50" N - 005°40'43" E
 47°15'10" N - 005°19'03" E
 47°18'45" N - 005°12'51" E
 FL185/FL195

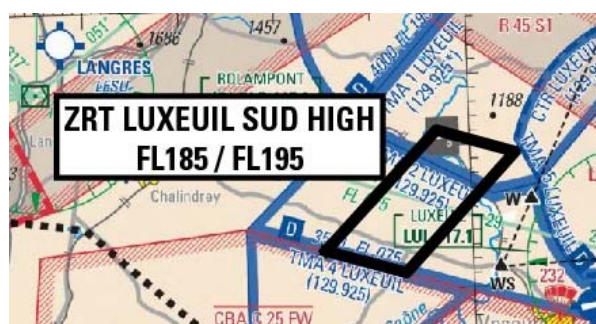
USER INFORMATION

Actual time slots provided by :

Luxeuil APP : 129.925 MHz
 Bâle INFO : 135.850 MHz
 Reims ACC (sector SE) : 124.950 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Luxeuil Sud High**LATERAL AND VERTICAL LIMITS**

47°42'46" N - 005°44'51" E
 47°50'59" N - 005°56'47" E
 47°49'16" N - 006°04'55" E
 47°41'03" N - 005°53'10" E
 47°42'46" N - 005°44'51" E
 FL185/FL195

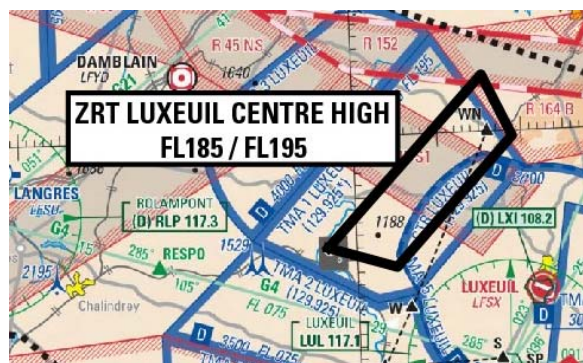
USER INFORMATION

Actual time slots provided by :

Reims ACC (sector SE) : 124.950 MHz
 Luxeuil APP : 129.925 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Luxeuil Centre High**LATERAL AND VERTICAL LIMITS**

47°50'59" N - 005°56'47" E
 48°04'29" N - 006°15'47" E
 47°59'29" N - 006°19'12" E
 47°49'16" N - 006°04'55" E
 47°50'59" N - 005°56'47" E
 FL185/FL195

USER INFORMATION

Actual time slots provided by :

Reims ACC (sector SE) : 124.950 MHz
 Luxeuil APP : 129.925 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Luxeuil Est High**LATERAL AND VERTICAL LIMITS**

48°04'29" N - 006°15'47.00" E
 48°08'20" N - 007°02'56.50" E
 48°03'12" N - 007°03'48.48" E
 47°59'29" N - 006°19'12.00" E
 48°04'29" N - 006°15'47.00" E
 FL185/FL195

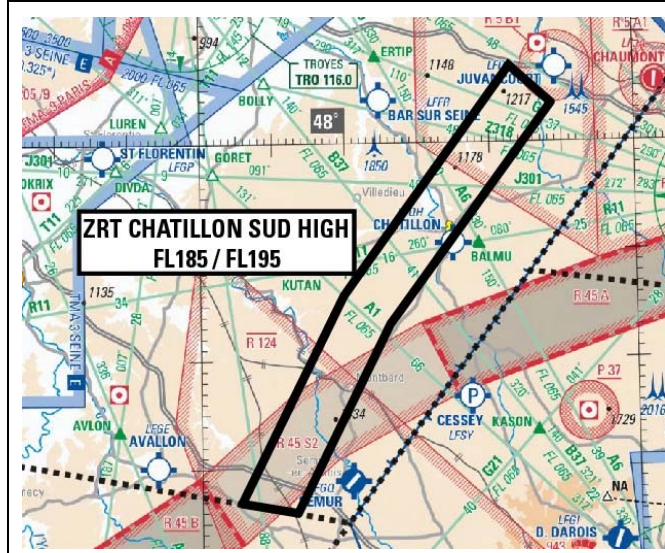
USER INFORMATION

Actual time slots provided by :

Luxeuil APP : 129.925 MHz
 Reims ACC (sector E) : 128.300 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Châtillon Sud High**LATERAL AND VERTICAL LIMITS**

48°06'56" N - 004°43'04" E
 48°03'27" N - 004°48'46" E
 47°44'07" N - 004°27'08" E
 47°44'07" N - 004°27'08" E
 47°43'14" N - 004°26'08" E
 47°25'52" N - 004°13'05" E
 47°26'48" N - 004°05'26" E
 47°45'52" N - 004°19'46" E
 47°47'50" N - 004°21'54" E
 48°06'56" N - 004°43'04" E

FL185/FL195

USER INFORMATION

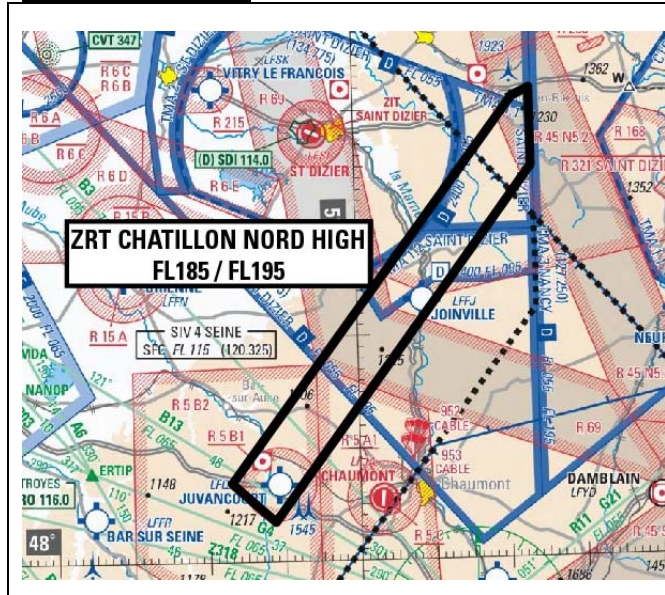
Actual time slots provided by :

Paris CTL : 120.950 MHz, 125.080 MHz,
 125.450 MHz, 132.100 MHz

RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Châtillon Nord High**LATERAL AND VERTICAL LIMITS**

48°40'56" N - 005°21'30" E
 48°41'43" N - 005°23'50" E
 48°34'46" N - 005°23'50" E
 48°23'32" N - 005°11'13" E
 48°03'27" N - 004°48'46" E
 48°06'56" N - 004°43'04" E
 48°40'56" N - 005°21'30" E

FL185/FL195

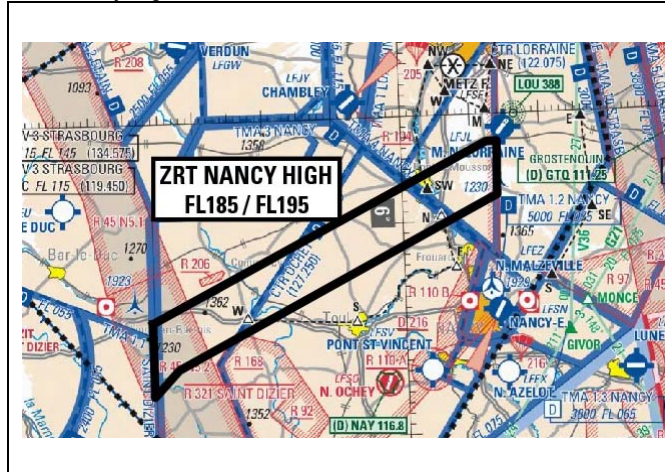
USER INFORMATION

Actual time slots provided by :

Saint Dizier APP : 134.775 MHz
 Reims ACC (sector E) : 128.300 MHz
 Paris CTL : 120.950 MHz, 125.075 MHz, 132.100 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Nancy High**LATERAL AND VERTICAL LIMITS**

48°41'43" N - 005°23'50" E
 48°57'54" N - 006°12'36" E
 48°57'55" N - 006°14'08" E
 48°52'52" N - 006°13'56" E
 48°37'15" N - 005°27'24" E
 48°34'46" N - 005°23'50" E
 48°41'43" N - 005°23'50" E

FL185/FL195

USER INFORMATION

Actual time slots provided by :

Ochey APP : 127.250 MHz
 Reims ACC (sector E) : 128.300 MHz
 RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.

ZRT Grostenquin High



LATERAL AND VERTICAL LIMITS

48°57'55" N - 006°14'08" E
48°57'55" N - 007°05'00" E
48°52'52" N - 007°05'00" E
48°52'52" N - 006°13'56" E
48°57'55" N - 006°14'08" E

FL185/FL195

USER INFORMATION

Actual time slots provided by :
Ochey APP : 127.250 MHz
Reims ACC (sector E) : 128.300 MHz
RAKI (Cinq Mars la Pile CRC) : 119.700 MHz, 143.550 MHz, 317.500 MHz

MANAGING AUTHORITY

Cinq-Mars-la-Pile CRC or back-up CRC.