

APPROCHE AUX INSTRUMENTS



LIMOGES BELLEGARDE

Instrument approach

CAT A B C D

ALT AD : 1300, THR : 1278 (46 hPa)

ILS CAT I ou/ou ILS CAT II et/and III ou/ou LOC RWY 21

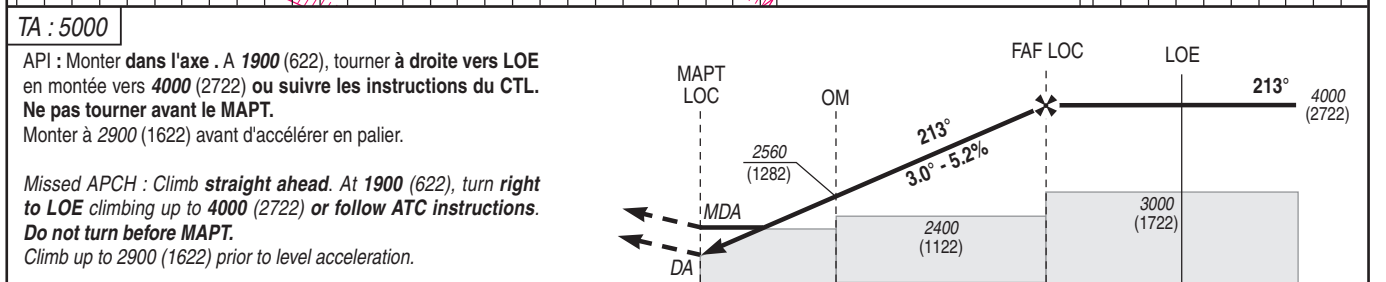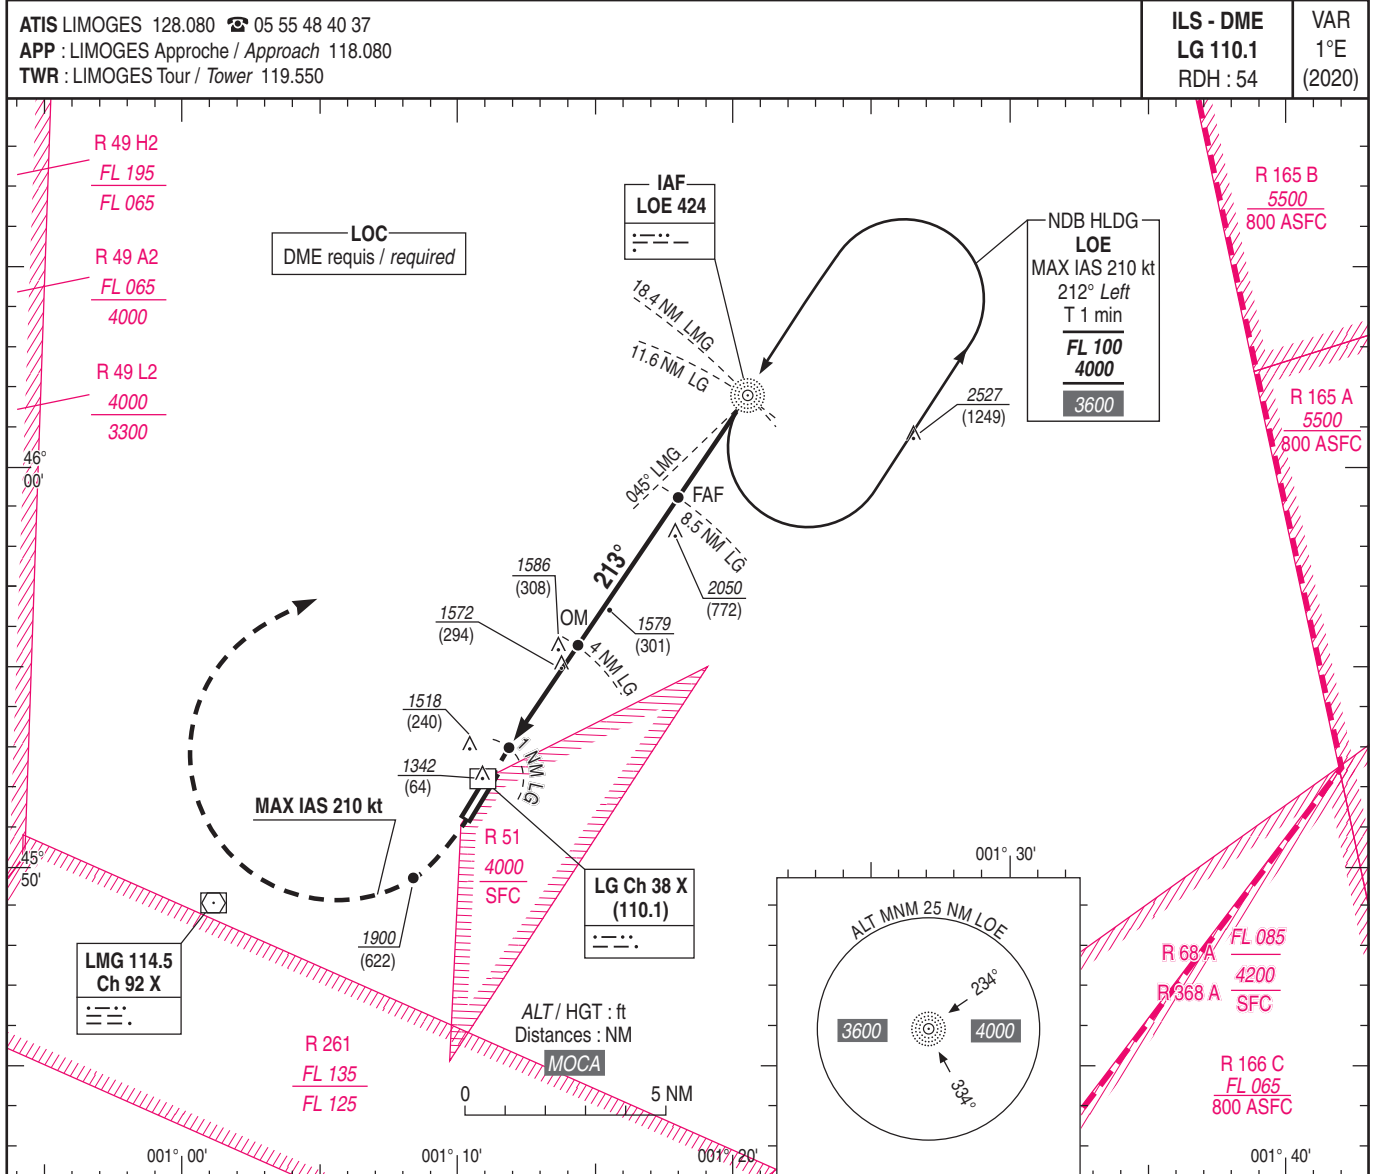

THR ← (NM)	0.8	3.8	8.4	11.5
DME LG ← (NM)	1	4	8.5	11.6

MNM AD : distances verticales en pieds, RVR et VIS en mètres / vertical distances in feet, RVR and VIS in metres. REF HGT : ALT THR

CAT	ILS		OCH CAT 1	OCH CAT 2	LOC + DME LG			MVL / Circling ⁽¹⁾		APP RWY 21 homologuée CAT 2 et 3 (2)(3) (RVR MNM 125 m) APCH RWY 21 approved CAT 2 and 3 (2)(3) (RVR MNM 125 m)
	DA (H)	RVR	MDA (H)	RVR	OCH	MDA (H)	VIS	DME LG		
A	1480 (200)	550	159	70	1820 (540)	540	1820 (540)	1500	1500	NM 2 3 4 5 6 7 8 ALT 1920 2240 2560 2870 3190 3510 3830 (HGT) (642) (962) (1282) (1592) (1912) (2232) (2552)
B			169	83			1500	1600		
C			182	94			1700	2400		
D			196	100			1700	3600		

Observations / Remarks : (1) MVL interdites au Sud-Est de la piste - (2) Base OCH ILS CAT 2 : plan sol - (3) CAT 2 et 3 : aéronef de CAT D : VAT < 142 kt. (1) Circling prohibited SE of RWY - (2) OCH base ILS CAT 2 : ground plan - (3) CAT 2 and 3 : CAT D ACFT : VAT < 142 kt.

FAF - THR	8.4 NM	70 kt	85 kt	100 kt	115 kt	130 kt	145 kt	160 kt	185 kt
VSP (ft/min)		7 min 11	5 min 55	5 min 02	4 min 22	3 min 52	3 min 29	3 min 09	2 min 43
		370	450	530	610	685	765	845	980