

APPROCHE AUX INSTRUMENTS

SAINT YAN


Instrument approach

CAT A B C


ALT AD : 797, THR : 797 (29 hPa)

FNA ILS Y ou/or LOC Y RWY 33R

ATIS SAINT YAN : 132.480 FREQ : voir / see AD 2 LFLN COM 01	ILS SN 111.75 RDH : 52	VAR 2°E (20)
----------------------------------------------------------------	-------------------------------------	---------------------------

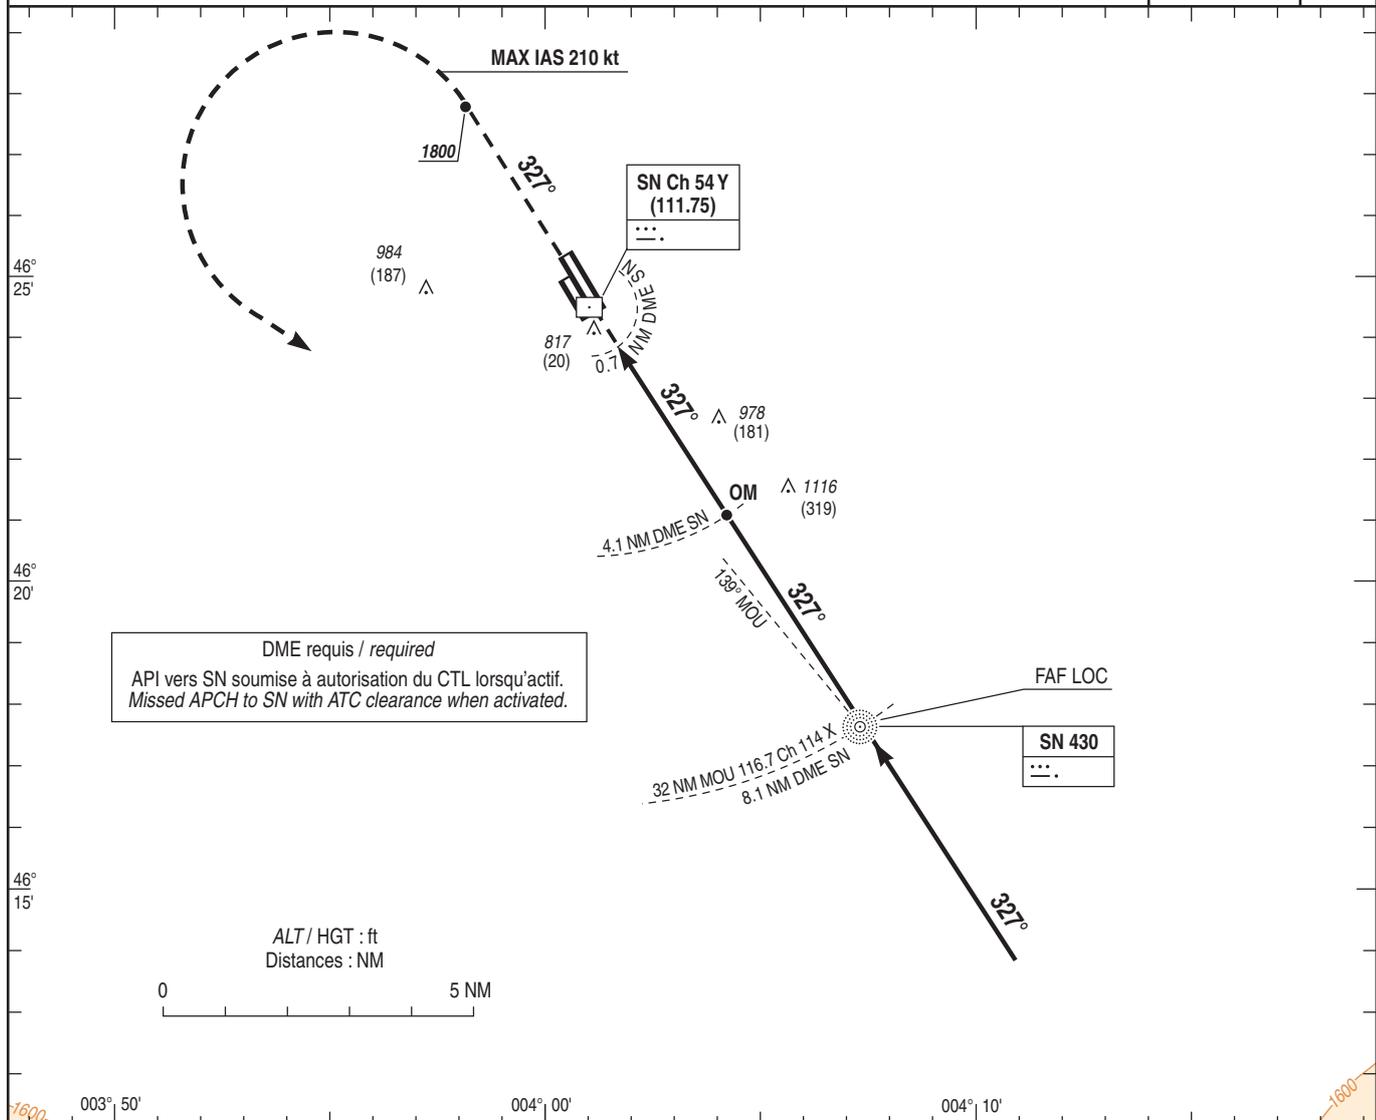

DME requis / required
API vers SN soumise à autorisation du CTL lorsqu'actif.
Missed APCH to SN with ATC clearance when activated.

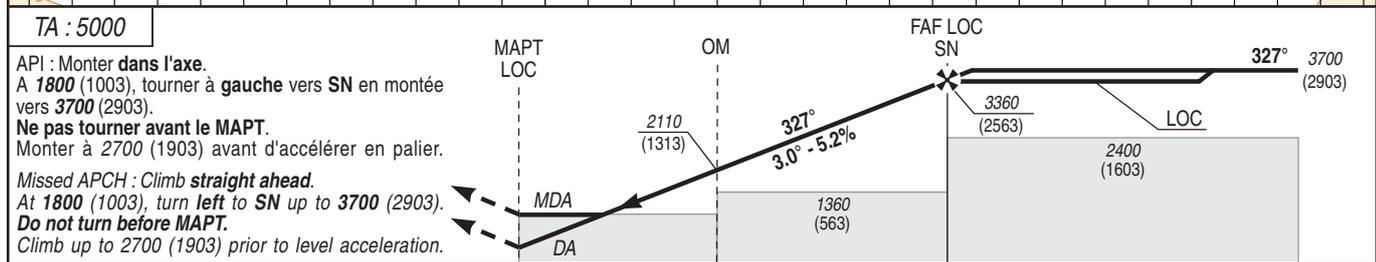

THR ← (NM)	0.5	4	7.9
DME ← (NM)	0.7	4.1	8.1

MNM AD : distances verticales en pieds, RVR et VIS en mètres / vertical distances in feet, RVR and VIS in metres. REF HGT : ALT THR

CAT	ILS Y			LOC Y			MVL / Circling ⁽¹⁾		MVL / Circling ⁽¹⁾ absence ATS sans QNH local / without local QNH HJ seulement / only		DME SN						
	DA (H)	RVR	OCH	MDA (H)	RVR	OCH	MDA (H)	VIS	MDA (H)	VIS	NM	7	6	5	4	3	2
A			147				1330 (530)	1500	1560 (770)	1500							
B	1000 (200)	550	154	1230 (430)	1300	427	1340 (540)	1600	1580 (780)	1600							
C			164				1580 (790)	2400	1820 (1020)	2400							

Observations/Remarks : (1) MVL interdites à l'Est des pistes, sauf clairance du CTL / Circling prohibited East of RWY, except ATC clearance.
Circuit AD RWY 15 : Droite / Right hand circuit RWY 15.

NDB - MAPT LOC	7.4 NM	70 kt	85 kt	100 kt	115 kt	130 kt	145 kt	160 kt
VSP (ft/min)	421	512	603	693	784	873	965	