

APPROCHE AUX INSTRUMENTS

RAIATEA UTUROA



Instrument approach

CAT A B

RNP RWY 25

ALT AD : 6 (1 hPa), THR : 6

APP : TAHITI Contrôle / Control 134.700	RNP APCH	VAR
TWR : RAIATEA Tour / Tower 118.500		13° E
Absence ATS : A/A (118.500) FR seulement / only. Obtenir le QNH prévu auprès de / Obtain QNH forecast from TAHITI CTL ou sur / or on TEMSI.		(2025)

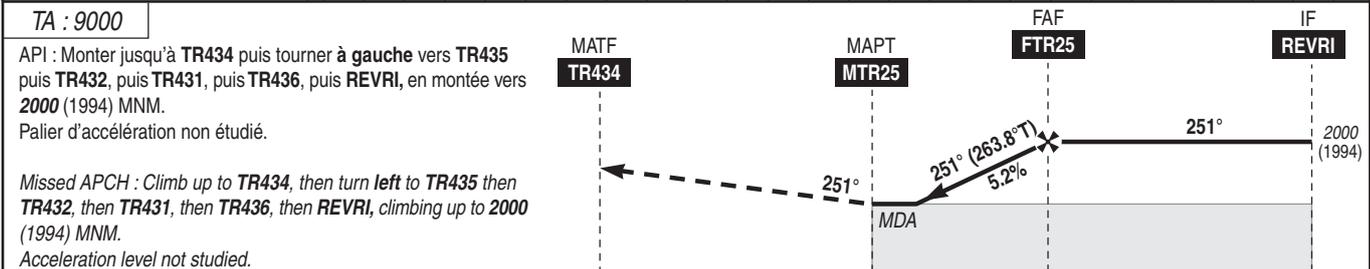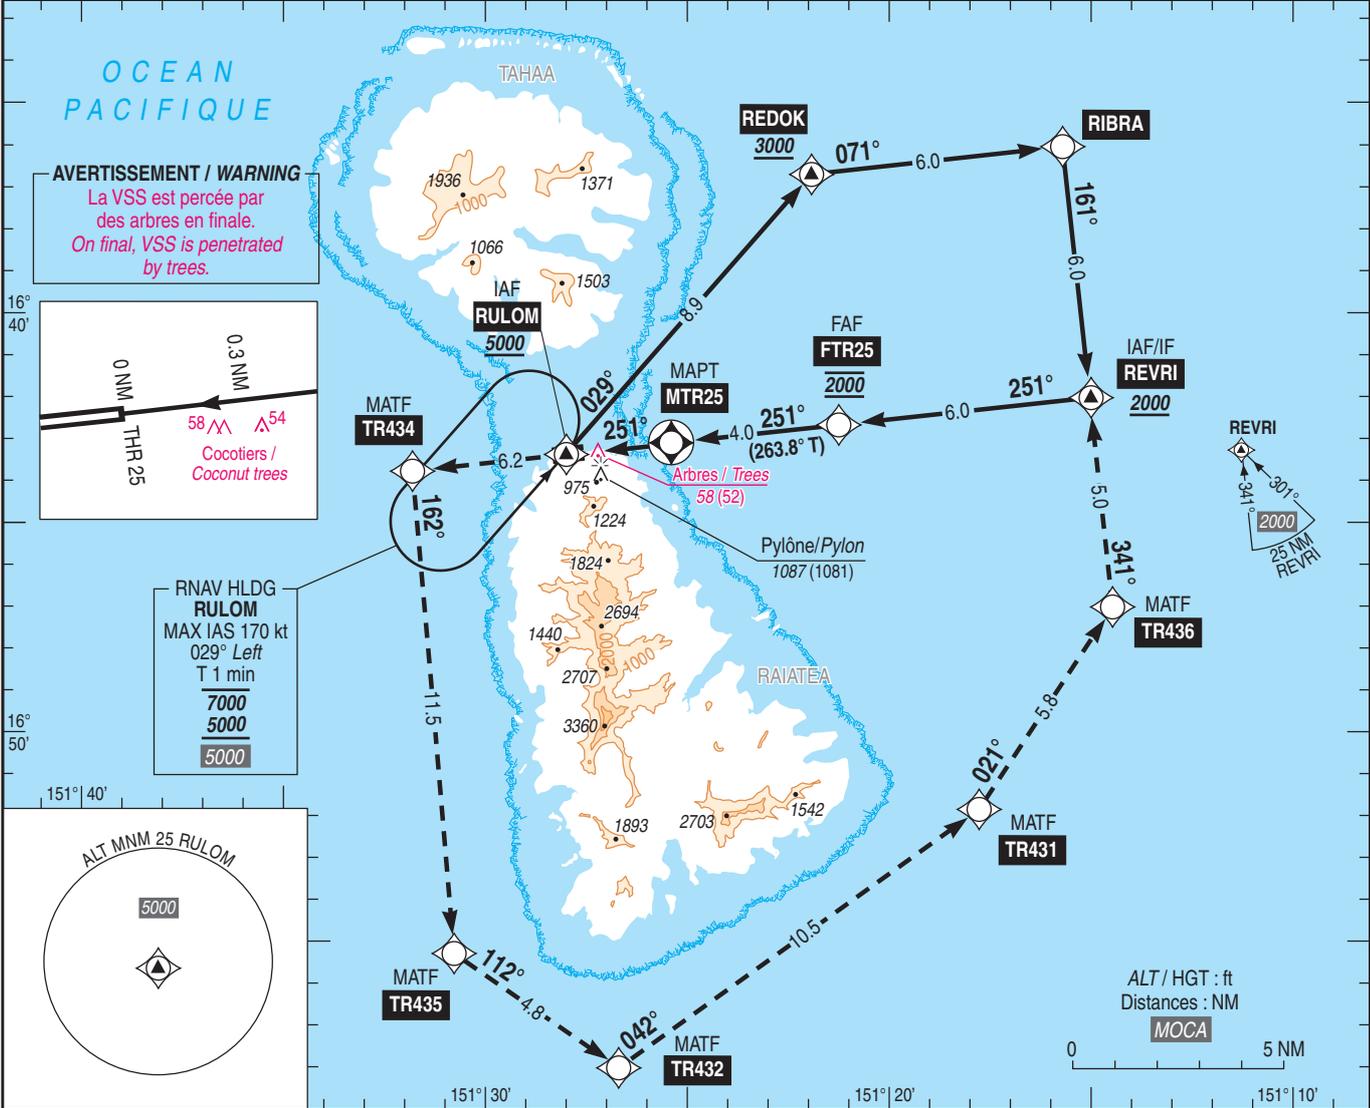

THR ← (NM) 4.1 0 2.1 6.1 12.1

MNM AD : distances verticales en pieds, RVR et VIS en mètres / vertical distances in feet, RVR and VIS in metres. REF HGT : ALT AD

CAT	LNAV			MVL/Circling (1)			MVL/Circling (1) Absence ATS (2) Sans / Without QNH local			DIST MTR25			
	MDA (H)	RVR	OCH	MDA (H)	VIS	OCH	MDA (H)	VIS	OCH	NM	2	3	4
A	1200 (1190)	1500	1190	1620 (1610)	1500	1610	1790 (1780)	1500	1778	ALT (HGT)	1360 (1354)	1680 (1674)	2000 (1994)
B					1600			1600					

Observations/Remarks : (1) MVL interdites au Sud de la piste / Circling prohibited South of RWY.
(2) MVL/Circling absence ATS : HJ seulement si PCL hors service / daytime only if PCL U/S.
Panne de guidage GNSS lors de l'approche / Loss of GNSS guidance during approach : voir / see AIP ENR 1.5.

FAF - MAPT	4 NM	70 kt	80 kt	90 kt	100 kt	110 kt	120 kt	130 kt
FAF - THR	6.1 NM	3 min 26	3 min 00	2 min 40	2 min 24	2 min 11	2 min 00	1 min 51
VSP (ft/min)		5 min 13	4 min 34	4 min 04	3 min 39	3 min 19	3 min 03	2 min 49
		370	425	480	530	585	640	690